

Original citation:

Lazic, Ranko and Schmitz, Sylvain. (2015) Nonelementary complexities for branching VASS, MELL, and extensions. ACM Transactions on Computational Logic (TOCL), Volume 16 (Number 3). Article number 20.

Permanent WRAP url:

<http://wrap.warwick.ac.uk/67995>

Copyright and reuse:

The Warwick Research Archive Portal (WRAP) makes this work by researchers of the University of Warwick available open access under the following conditions. Copyright © and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners. To the extent reasonable and practicable the material made available in WRAP has been checked for eligibility before being made available.

Copies of full items can be used for personal research or study, educational, or not-for profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

Publisher's statement:

"© ACM, 2015. This is the author's version of the work. It is posted here by permission of ACM for your personal use. Not for redistribution. The definitive version was published in ACM Transactions on Computational Logic (TOCL), Volume 16 (Number 3) (2015) <http://doi.acm.org/10.1145/2733375> "

A note on versions:

The version presented here may differ from the published version or, version of record, if you wish to cite this item you are advised to consult the publisher's version. Please see the 'permanent WRAP url' above for details on accessing the published version and note that access may require a subscription.

For more information, please contact the WRAP Team at: publications@warwick.ac.uk



<http://wrap.warwick.ac.uk>

Non-Elementary Complexities for Branching VASS, MELL, and Extensions

RANKO LAZIĆ, DIMAP, Department of Computer Science, University of Warwick
SYLVAIN SCHMITZ, ENS Cachan & INRIA

We study the complexity of reachability problems on branching extensions of vector addition systems, which allows us to derive new non-elementary complexity bounds for fragments and variants of propositional linear logic. We show that provability in the multiplicative exponential fragment is TOWER-hard already in the affine case—and hence non-elementary. We match this lower bound for the full propositional affine linear logic, proving its TOWER-completeness. We also show that provability in propositional contractive linear logic is ACKERMANN-complete.

Categories and Subject Descriptors: F.2.2 [Analysis of Algorithms and Problem Complexity]: Nonnumerical Algorithms and Problems—Complexity of proof procedures; F.4.1 [Mathematical Logic and Formal Languages]: Mathematical Logic

General Terms: Theory

Additional Key Words and Phrases: Fast-growing complexity, linear logic, vector addition systems

ACM Reference Format:

Ranko Lazić and Sylvain Schmitz. 2014. Non-Elementary Complexities for Branching VASS, MELL, and Extensions *ACM Trans. Comput. Logic* V, N, Article A (January YYYY), 30 pages.
DOI: <http://dx.doi.org/10.1145/0000000.0000000>

1. INTRODUCTION

The use of various classes of counter machines to provide computational counterparts to propositional substructural logics has been highly fruitful, allowing to prove for instance:

- the undecidability of provability in propositional linear logic (LL), thanks to a reduction from the halting problem in Minsky machines proved by Lincoln, Mitchell, Scedrov, and Shankar [1992], who initiated much of this line of work,
- the decidability of the !-Horn fragment of multiplicative exponential linear logic, proved by Kanovich [1995] by reduction to reachability in vector addition systems,
- the decidability of provability in affine linear logic, first shown by Kopylov using a notion of vector addition games [Kopylov 2001],
- the ACKERMANN-completeness of provability in the conjunctive implicative fragment of relevance logic, proved by Urquhart [1999], using reductions to and from expansive alternating vector addition systems, and

Work partially supported by ANR grant ReachHard 11-BS02-001-01. Revised and extended version of an article presented at the *Joint meeting of the 23rd EACSL Annual Conference on Computer Science Logic and the 29th Annual ACM/IEEE Symposium on Logic in Computer Science (CSL-LICS 2014)*.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies show this notice on the first page or initial screen of a display along with the full citation. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers, to redistribute to lists, or to use any component of this work in other works requires prior specific permission and/or a fee. Permissions may be requested from Publications Dept., ACM, Inc., 2 Penn Plaza, Suite 701, New York, NY 10121-0701 USA, fax +1 (212) 869-0481, or permissions@acm.org.

© YYYY ACM 1529-3785/YYYY/01-ARTA \$15.00
DOI: <http://dx.doi.org/10.1145/0000000.0000000>

- the inter-reducibility between provability in multiplicative exponential linear logic and reachability in a model of branching vector addition systems, shown by de Groote, Guillaume, and Salvati [2004].

1.1. Alternating Branching VASS

In this paper, we revisit the correspondences between propositional linear logic and counter systems with a focus on computational complexity. In Section 3, we define a model of *alternating branching vector addition systems* (ABVASS) with *full zero tests*. While this model can be seen as an extension and repackaging of Kopylov’s vector games, its reachability problem enjoys very simple reductions to and from provability in LL, which are suitable for complexity statements (see Section 4). We prove that:

- coverability in the top-down, root-to-leaves direction is TOWER-complete, i.e. complete for the class of problems that can be solved with time or space resources bounded by a tower of exponentials whose height depends elementarily on the input size (see Section 5 for the upper bound and Section 6 for the lower bound), and
- coverability in the bottom-up, leaves-to-root direction is complete for ACKERMANN, i.e. complete for resources bounded by the Ackermann function of some primitive-recursive function of the input (see Section 7).

1.2. Provability in Substructural Logics

Our complexity bounds for ABVASS translate into the exact same bounds for provability in fragments and variants of LL:

1.2.1. Affine Linear Logic (LLW) was proved decidable by Kopylov [2001] in 1995 using vector addition games; a model-theoretic proof was later presented by Lafont [1997].¹

The best known complexity bounds for LLW are due to Urquhart [2000]: by a reduction from coverability in vector addition systems [Lipton 1976], he derives an EXPSpace lower bound, very far from the ACKERMANN upper bound he obtains from length function theorems for Dickson’s Lemma [see e.g. Figueira et al. 2011].

1.2.2. Contractive Linear Logic (LLC) was proved decidable by Okada and Terui [1999] by model-theoretic methods.

Urquhart [1999] showed the ACKERMANN-completeness of provability in a fragment of relevance logic, which is also a fragment of intuitionistic multiplicative additive LLC. To the best of our knowledge, there are no known complexity upper bounds for provability in LLC.

1.2.3. Multiplicative Exponential Linear Logic. The main open question in this area is whether the multiplicative exponential fragment (MELL) is decidable. It is related to many decision problems, for instance in computational linguistics [Rambow 1994; Schmitz 2010], cryptographic protocol verification [Verma and Goubault-Larrecq 2005], the verification of parallel programs [Bouajjani and Emmi 2013], and data logics [Bojańczyk et al. 2009; Dimino et al. 2013].

Thanks to the reductions to and from the reachability problem in branching vector addition systems with states (BVASS) [de Groote et al. 2004] and to the bounds of Lazić [2010], we know that provability in MELL is 2-EXPSpace-hard.

¹ Variants of LLW are popular in the literature on implicit complexity; for instance, *light affine linear logic* [Asperti and Roversi 2002] is known to type exactly the class FP of polynomial time computable functions. In this paper we are however interested in the complexity of the provability problem (for the propositional fragment), rather than the complexity of normalisation. In terms of typed lambda calculi, our results pertain to the complexity of the type inhabitation problem.

1.2.4. Summary of the Complexity Results:

LLW. We improve both the lower bound and the upper bound of Urquhart [2000], and prove that LLW provability is complete for TOWER.

LLC. We show that LLC provability is ACKERMANN-complete; the lower bound already holds for the multiplicative additive fragment MALLC.

MELL. Our TOWER-hardness result for LLW already holds for affine MELL and thus for MELL, which improves over the 2-EXPSpace lower bound of Lazić [2010].

ILL. All of our complexity bounds also hold for provability in the intuitionistic versions of our calculi. See §4.1.2 for details.

2. PROPOSITIONAL LINEAR LOGIC

2.1. Classical Linear Logic

For convenience, we present here a sequent calculus for classical propositional linear logic that works with formulæ in negation normal form and considers one-sided sequents [see e.g. Troelstra 1992].

2.1.1. *Syntax.* Propositional linear logic formulæ are defined by the abstract syntax

$$\begin{array}{ll}
 A, B ::= a \mid a^\perp & \text{(atomic)} \\
 \mid A \wp B \mid A \otimes B \mid \perp \mid \mathbf{1} & \text{(multiplicative)} \\
 \mid A \& B \mid A \oplus B \mid \top \mid \mathbf{0} & \text{(additive)} \\
 \mid !A \mid ?A & \text{(exponential)}
 \end{array}$$

where a ranges over atomic formulæ. We write “ A^\perp ” for the negation normal form of A , where negations are pushed to the atoms using the dualities $A^{\perp\perp} = A$, $(A \wp B)^\perp = A^\perp \otimes B^\perp$, $\perp^\perp = \mathbf{1}$, $(A \& B)^\perp = A^\perp \oplus B^\perp$, $\top^\perp = \mathbf{0}$, and $(?A)^\perp = !A^\perp$. We write “ $A \multimap B$ ” for the linear implication $A^\perp \wp B$.

2.1.2. *Sequent Calculus.* The rules of the sequent calculus manipulate multisets of formulæ, denoted by Γ, Δ, \dots , so that the exchange rule is implicit; “ $? \Gamma$ ” then denotes a multiset of formulæ all guarded by why-nots: $? \Gamma$ is of the form $?A_1, \dots, ?A_n$.

$$\begin{array}{c}
 \frac{}{\vdash A, A^\perp} \text{init} \quad \frac{\vdash \Gamma, A \quad \vdash \Delta, A^\perp}{\vdash \Gamma, \Delta} \text{cut} \\
 \\
 \frac{\vdash \Gamma, A, B}{\vdash \Gamma, A \wp B} \wp \quad \frac{\vdash \Gamma, A \quad \vdash \Delta, B}{\vdash \Gamma, \Delta, A \otimes B} \otimes \quad \frac{\vdash \Gamma}{\vdash \Gamma, \perp} \perp \quad \frac{}{\vdash \mathbf{1}} \mathbf{1} \\
 \\
 \frac{\vdash \Gamma, A \quad \vdash \Gamma, B}{\vdash \Gamma, A \& B} \& \quad \frac{\vdash \Gamma, A \quad \vdash \Gamma, B}{\vdash \Gamma, A \oplus B} \oplus \quad \frac{}{\vdash \Gamma, \top} \top \\
 \\
 \frac{\vdash \Gamma, A}{\vdash \Gamma, ?A} ?D \quad \frac{\vdash \Gamma}{\vdash \Gamma, ?A} ?W \quad \frac{\vdash \Gamma, ?A, ?A}{\vdash \Gamma, ?A} ?C \quad \frac{\vdash ?\Gamma, A}{\vdash ?\Gamma, !A} ?P
 \end{array}$$

The last four rules for exponential formulæ are called *dereliction* (?D), *logical weakening* (?W), *logical contraction* (?C), and *promotion* (?P).

The *cut* rule can be eliminated in this calculus, which then enjoys the *subformula property*: in any rule except cut, the formulæ appearing in the premises are subformulæ of the formulæ appearing in the conclusion.

2.2. Fragments and Variants

Lincoln et al. [1992] established most of the results on the decidability and complexity of provability in propositional linear logic. In particular, the full propositional linear

logic (LL) is undecidable, while its multiplicative additive fragment (MALL, which excludes the exponential connectives and rules) is decidable in polynomial space. As mentioned in the introduction, the main open question in this area is whether the multiplicative exponential fragment (MELL, which excludes the additive connectives and rules) is decidable.

Regarding related logics, the structural rules of *structural weakening* (W) and *structural contraction* (C)

$$\frac{\vdash \Gamma}{\vdash \Gamma, A} \text{ W} \quad \frac{\vdash \Gamma, A, A}{\vdash \Gamma, A} \text{ C}$$

give rise to two decidable variants of LL. If we replace logical weakening (?W) by structural weakening (W), we define *affine* linear logic (LLW). If we similarly replace logical contraction (?C) by structural contraction (C), we define *contractive* linear logic (LLC). The sequent calculi for LLW and LLC also enjoy cut elimination and the subformula property for cut-free proofs.

2.2.1. Intuitionistic Linear Logic. Intuitionistic linear logic is essentially obtained from classical linear logic by restricting its two-sided sequent calculus to consequents (the right sides of sequents) with at most one formula. We present here a variant of intuitionistic linear logic with bottom [Troelstra 1992, Section 2.5], which we will refer to as **ILZ**:

$$\begin{array}{c} \frac{}{A \vdash A} \text{ init} \quad \frac{\Gamma \vdash A \quad \Delta, A \vdash B}{\Gamma, \Delta \vdash B} \text{ cut} \\ \\ \frac{\Gamma \vdash A \quad \Delta, B \vdash C}{\Gamma, \Delta, A \multimap B \vdash C} \text{ L}_{\multimap} \quad \frac{\Gamma, A \vdash B}{\Gamma \vdash A \multimap B} \text{ R}_{\multimap} \\ \\ \frac{\Gamma, A, B \vdash C}{\Gamma, A \otimes B \vdash C} \text{ L}_{\otimes} \quad \frac{\Gamma \vdash A \quad \Delta \vdash B}{\Gamma, \Delta \vdash A \otimes B} \text{ R}_{\otimes} \\ \\ \frac{}{\perp \vdash} \text{ L}_{\perp} \quad \frac{\Gamma \vdash}{\Gamma \vdash \perp} \text{ R}_{\perp} \\ \\ \frac{\Gamma \vdash A}{\Gamma, \mathbf{1} \vdash A} \text{ L}_{\mathbf{1}} \quad \frac{}{\vdash \mathbf{1}} \text{ R}_{\mathbf{1}} \\ \\ \frac{\Gamma, A \vdash C \quad \Gamma, B \vdash C}{\Gamma, A \oplus B \vdash C} \text{ L}_{\oplus} \quad \frac{\Gamma \vdash A \quad \Gamma \vdash B}{\Gamma \vdash A \oplus B} \text{ R}_{\oplus} \\ \\ \frac{\Gamma, A \vdash C \quad \Gamma, B \vdash C}{\Gamma, A \& B \vdash C} \text{ L}_{\&} \quad \frac{\Gamma \vdash A \quad \Gamma \vdash B}{\Gamma \vdash A \& B} \text{ R}_{\&} \\ \\ \frac{}{\Gamma \vdash \top} \text{ R}_{\top} \\ \\ \frac{\Gamma, A \vdash B}{\Gamma, !A \vdash B} \text{ !D} \quad \frac{\Gamma \vdash B}{\Gamma, !A \vdash B} \text{ !W} \quad \frac{\Gamma, !A, !A \vdash B}{\Gamma, !A \vdash B} \text{ !C} \quad \frac{\Gamma \vdash A}{\Gamma \vdash !A} \text{ !P} \end{array}$$

The fragment without \perp is better known as **ILL**.

2.2.2. Affine and Contractive Variants. The intuitionistic versions with bottom **ILZW** and **ILLZC** and without bottom **ILLW** and **ILLC** of LLW and LLC are respectively obtained

by adding structural weakening and structural contraction:

$$\frac{\Gamma \vdash B}{\Gamma, A \vdash B} \text{ W} \quad \frac{\Gamma, A, A \vdash B}{\Gamma, A \vdash B} \text{ C}$$

As with the sequent calculi for LL, LLW, and LLC, the intuitionistic calculi for ILZ, ILZW, and ILZC enjoy cut elimination and the subformula property for cut-free proofs.

2.2.3. Relevance Logic. The sequent calculus LR+ considered by Urquhart [1999] for a fragment of relevance logic is IMALLC without \top , i.e. ILZC restricted to $\{\neg, \otimes, \mathbf{1}, \oplus, \&\}$.

3. ALTERNATING BRANCHING VASS

We define a “tree” extension of vector addition systems with states (VASS) that combines two kinds of branching behaviours: those of alternating VASS (§3.3.1) and those of branching VASS (§3.3.2). With this combination, we obtain a reformulation of Kopylov’s vector addition games [Kopylov 2001], for which he showed that

- (1) the game is inter-reducible with LL provability
- (2) the “lossy” version of the game is inter-reducible with LLW provability.

We further add *full zero tests* to this model, as they make the reduction from LL provability straightforward (see Section 4) and can easily be removed (see §3.3.3).

3.1. Definitions

3.1.1. Syntax. An *alternating branching vector addition system with states and full zero tests* (ABVASS₀) is syntactically a tuple $\mathcal{A} = \langle Q, d, T_u, T_f, T_s, T_z \rangle$ where Q is a finite set of *states*, d is a *dimension* in \mathbb{N} , and $T_u \subseteq Q \times \mathbb{Z}^d \times Q$, $T_f \subseteq Q^3$, $T_s \subseteq Q^3$ and $T_z \subseteq Q^2$ are respectively finite sets of *unary*, *fork*, *split* and *full zero test* rules. We denote unary rules (q, \bar{u}, q_1) in T_u with \bar{u} in \mathbb{Z}^d by “ $q \xrightarrow{\bar{u}} q_1$ ”, fork rules (q, q_1, q_2) in T_f by “ $q \rightarrow q_1 \wedge q_2$ ”, split rules (q, q_1, q_2) in T_s by “ $q \rightarrow q_1 + q_2$ ”, and full zero test rules (q, q_1) in T_z by “ $q \xrightarrow{\bar{0}} q_1$ ”.

3.1.2. Deduction Semantics. Given an ABVASS₀, its semantics is defined by a deduction system over *configurations* (q, \bar{v}) in $Q \times \mathbb{N}^d$:

$$\frac{q, \bar{v}}{q_1, \bar{v} + \bar{u}} \text{ unary}$$

where “+” denotes component-wise addition in \mathbb{N}^d , if $q \xrightarrow{\bar{u}} q_1$ is a rule (and implicitly $\bar{v} + \bar{u}$ has no negative component, i.e. is in \mathbb{N}^d), and

$$\frac{q, \bar{v}}{q_1, \bar{v} \quad q_2, \bar{v}} \text{ fork} \quad \frac{q, \bar{v}_1 + \bar{v}_2}{q_1, \bar{v}_1 \quad q_2, \bar{v}_2} \text{ split} \quad \frac{q, \bar{0}}{q_1, \bar{0}} \text{ full-zero}$$

if $q \rightarrow q_1 \wedge q_2$, $q \rightarrow q_1 + q_2$, and $q \xrightarrow{\bar{0}} q_1$ are rules of the system, respectively, and “ $\bar{0}$ ” denotes the d -vector $(0, \dots, 0)$ with zeroes on every coordinate. Such a deduction system can be employed either *top-down* or *bottom-up* depending on the decision problem at hand (as with tree automata); the top-down direction will correspond in a natural way to *proof search* in propositional linear logic, i.e. will correspond to the consequence to premises direction in the sequent calculus of §2.1.2.

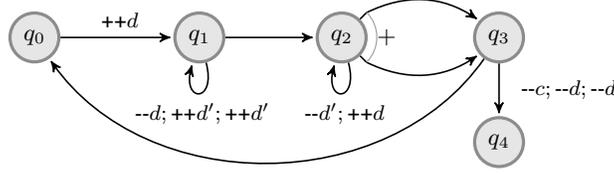


Fig. 1. An example BVASS.

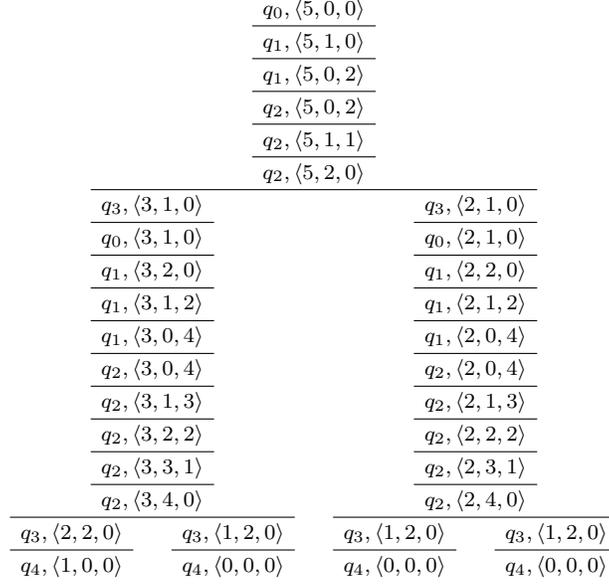


Fig. 2. A deduction tree in the BVASS of Figure 1.

3.1.3. *Example.* Let \mathcal{A} be an ABVASS_0 with five states $(q_0, q_1, q_2, q_3, q_4)$, of dimension 3, with six unary rules:

$$\begin{array}{lll}
 q_0 \xrightarrow{\langle 0, 1, 0 \rangle} q_1 & q_1 \xrightarrow{\langle 0, -1, 2 \rangle} q_1 & q_1 \xrightarrow{\langle 0, 0, 0 \rangle} q_2 \\
 q_2 \xrightarrow{\langle 0, 1, -1 \rangle} q_2 & q_3 \xrightarrow{\langle 0, 0, 0 \rangle} q_0 & q_3 \xrightarrow{\langle -1, -2, 0 \rangle} q_4,
 \end{array}$$

and with one split rule $q_2 \rightarrow q_3 + q_3$. There are no fork rules and no full zero test rules in \mathcal{A} , and so it is a BVASS (see §3.3.2). A depiction of \mathcal{A} is in Figure 1, where we write c, d, d' for vector indices 1, 2, 3 (respectively), and specify unary rules in terms of increments and decrements.

From state q_0 and with c, d, d' initialised to 5, 0, 0 (i.e., from a root node labelled by $(q_0, \langle 5, 0, 0 \rangle)$), \mathcal{A} can reach q_2 with d, d' having values 2, 0, perform the split rule by dividing c and d almost equally (i.e., branch to two nodes labelled by $(q_3, \langle 3, 1, 0 \rangle)$ and $(q_3, \langle 2, 1, 0 \rangle)$), then in both threads reach q_2 again with d, d' having values 4, 0, perform the split rule as before, and finally reach q_4 with c, d, d' having values 1, 0, 0 in one thread and 0, 0, 0 in the remaining three threads. See Figure 2 for the corresponding deduction tree.

Further reasoning, where we need to consider arbitrarily unequal splits, can show that \mathcal{A} has a deduction tree whose root is labelled by $(q_0, \langle m, 0, 0 \rangle)$ and with the state

label at every leaf being q_4 if and only if $m \geq 4$. In fact, \mathcal{A} is a slightly simplified version of the BVASS \mathcal{B}_2 in Section 6.

3.2. Decision Problems

Given an ABVASS $_{\bar{0}}$ \mathcal{A} and a finite set of states Q_ℓ , we denote by a *root judgement* “ $\mathcal{A}, Q_\ell \triangleright q, \bar{v}$ ” the fact that there exists a deduction tree \mathcal{D} in \mathcal{A} with root label (q, \bar{v}) and leaf labels in $Q_\ell \times \{\bar{0}\}$. We call \mathcal{D} a *reachability witness* for (q, \bar{v}) . Root judgements can be derived through the following deduction rules, which will be handy in proofs:

$$\frac{}{\mathcal{A}, Q_\ell \triangleright q_\ell, \bar{0}} \text{ if } q_\ell \in Q_\ell \quad \frac{\mathcal{A}, Q_\ell \triangleright q_1, \bar{v} + \bar{u}}{\mathcal{A}, Q_\ell \triangleright q, \bar{v}} \text{ if } q \xrightarrow{\bar{u}} q_1 \quad \frac{\mathcal{A}, Q_\ell \triangleright q_1, \bar{0}}{\mathcal{A}, Q_\ell \triangleright q, \bar{0}} \text{ if } q \xrightarrow{\bar{0}} q_1$$

$$\frac{\mathcal{A}, Q_\ell \triangleright q_1, \bar{v} \quad \mathcal{A}, Q_\ell \triangleright q_2, \bar{v}}{\mathcal{A}, Q_\ell \triangleright q, \bar{v}} \text{ if } q \rightarrow q_1 \wedge q_2 \quad \frac{\mathcal{A}, Q_\ell \triangleright q_1, \bar{v}_1 \quad \mathcal{A}, Q_\ell \triangleright q_2, \bar{v}_2}{\mathcal{A}, Q_\ell \triangleright q, \bar{v}_1 + \bar{v}_2} \text{ if } q \rightarrow q_1 + q_2$$

3.2.1. Reachability. Given an ABVASS $_{\bar{0}}$ \mathcal{A} , a finite set of states Q_ℓ , and a state q_r , the *reachability problem* asks whether $\mathcal{A}, Q_\ell \triangleright q_r, \bar{0}$; we call a *reachability witness* for $(q_r, \bar{0})$ more simply a *reachability witness*.

We will see in Section 4 that this reachability problem is equivalent to provability in LL; the problem is also related to games played over vectors of natural numbers, see Section 3.5. It is however undecidable:

FACT 3.1. *Reachability in ABVASS $_{\bar{0}}$ is undecidable.*

PROOF. Reachability is already undecidable in the more restricted model of AVASS, see Fact 3.2 below. \square

3.2.2. Lossy Reachability. In order to obtain decidability, we must weaken the ABVASS $_{\bar{0}}$ model or the decision problem. For the former, let us denote by \bar{e}_i the unit vector in \mathbb{N}^d with one on coordinate i and zero everywhere else. Then a *lossy* ABVASS $_{\bar{0}}$ can be understood as featuring a rule $q \xrightarrow{-\bar{e}_i} q$ for every q in Q and $0 < i \leq d$. We rather define it by extending its deduction system with

$$\frac{q, \bar{v}}{q, \bar{v} - \bar{e}_i} \text{ loss}$$

for every q in Q and $0 < i \leq d$. We write ‘ \triangleright_ℓ ’ for root judgements where losses can occur. In terms of proof search in linear logic, losses will correspond to structural weakening, which is the distinguishing feature of affine linear logic.

Top-Down Coverability. An alternative way to see the reachability problem in lossy ABVASS $_{\bar{0}}$ is to weaken the problem. Let us define a variant of ABVASS $_{\bar{0}}$ that feature *full resets* instead of full zero tests: we denote in this case rules (q, q_1) in T_z by $q \xrightarrow{:=\bar{0}} q_1$ and associate a different semantics:

$$\frac{q, \bar{v}}{q_1, \bar{0}} \text{ full-reset}$$

We call the resulting model ABVASS r . Given an ABVASS r \mathcal{A} , a state q_r , and a finite set of states Q_ℓ , the *top-down coverability* or *leaf coverability* problem asks whether there exists a deduction tree \mathcal{D} with root label $(q_r, \bar{0})$ and such that, for each leaf, there exists some q_ℓ in Q_ℓ and some \bar{v} in \mathbb{N}^d such that the leaf label is (q_ℓ, \bar{v}) ; we then call \mathcal{D} a *coverability witness*.

The reachability problem for lossy ABVASS $_{\bar{0}}$ is then equivalent to top-down coverability for ABVASS r . Observe indeed that the unary, fork, and split rules are *monotone*:

if $\bar{v} \leq \bar{w}$ for the product ordering, i.e. if $\bar{v}(i) \leq \bar{w}(i)$ for all $0 < i \leq d$, and a configuration (q, \bar{v}) allows to apply a rule and result in some configurations (q_1, \bar{v}_1) and (possibly) (q_2, \bar{v}_2) , then (q, \bar{w}) allows to apply the same rule and to obtain some (q_1, \bar{w}_1) and (q_2, \bar{w}_2) with $\bar{v}_1 \leq \bar{w}_1$ and $\bar{v}_2 \leq \bar{w}_2$. This means that losses in an ABVASS_0 can be applied as late as possible, either right before a full zero test or at the leaves—which corresponds exactly to top-down coverability for ABVASS_r .

3.2.3. Expansive Reachability. In order to model structural contractions during proof search, it is natural to consider another variant of ABVASS_0 called *expansive* ABVASS_0 and equipped with the deduction rules

$$\frac{q, \bar{v} + \bar{e}_i}{q, \bar{v} + 2\bar{e}_i} \text{ expansion}$$

for every q in Q and $0 < i \leq d$. We write \triangleright_e for root judgements where expansions can occur. This is a restriction over ABVASS_0 since expansions can be emulated through two unary rules $q \xrightarrow{-\bar{e}_i} q' \xrightarrow{2\bar{e}_i} q$. Expansive reachability is not quite dual to lossy reachability—we deal with *increasing reachability* in Section 7.

3.3. Restrictions

Note that ABVASS_0 generalise *vector addition systems with states* (VASS), which are ABVASS_0 with only unary rules. They also generalise two “branching” extensions of VASS, which have been defined in relation with propositional linear logic. Since these restrictions do not feature full zero tests, their lossy reachability problem is equivalent to their top-down coverability problem.

3.3.1. Alternating VASS were originally called “and-branching” counter machines by Lincoln et al. [1992], and were introduced to prove the undecidability of propositional linear logic. Formally, an AVASS is an ABVASS_0 which only features unary and fork rules, i.e. with $T_s = T_z = \emptyset$.

FACT 3.2 (LINCOLN ET AL. [1992]). *Reachability in AVASS is undecidable.*

PROOF IDEA. By a reduction from the halting problem in Minsky machines: note that a zero test $q \xrightarrow{c=0} q'$ on a counter c can be emulated through a fork $q \rightarrow q' \wedge q_c$, where unary rules $q_c \xrightarrow{-\bar{e}_{c'}} q_c$ for all $c' \neq c$ allow to empty the counters different from c , and a last unary rule $q_c \xrightarrow{0} q_e$ to the single target state allows to check that c was indeed equal to zero. \square

Alternating VASS do not allow to model LL proof search in full; Kanovich [1995] identified the matching LL fragment, called the $(!, \oplus)$ -Horn fragment.

The complexity of the other basic reachability problems on AVASS is known:

- motivated by the complexity of fragments of relevance logic, Urquhart [1999] proved that expansive reachability is complete for Ackermannian time, and
- motivated by the complexity of vector addition games (see Section 3.5), Courtois and Schmitz [2014] showed that lossy reachability is 2-EXPTIME-complete.

3.3.2. Branching VASS. Inspired by the correspondences between the $!$ -Horn fragment of linear logic and VASS unearthed by Kanovich [1995], de Groote et al. [2004] defined BVASS—which they originally dubbed “vector addition tree automata”—as a model of counter machines that matches MELL. Formally, a BVASS is an ABVASS_0 with only unary and split rules, i.e. with $T_f = T_z = \emptyset$. This model turned out to be equivalent to independently defined models in linguistics [Rambow 1994] and protocol verification [Verma and Goubault-Larrecq 2005]; see [Schmitz 2010] for a survey.

Whether BVASS reachability is decidable is an open problem, and is inter-reducible with MELL provability. Lazić [2010] proved the best known lower bound to this day, which is 2-EXPSpace-hardness. Two related problems were shown to be 2-EXPTIME-complete by Demri et al. [2013], namely increasing reachability (see Section 7) and boundedness.

3.3.3. Alternating Branching VASS. Kopylov [2001] defined a one-player vector game, which matches essentially the reachability problem in ABVASS, i.e. in $\text{ABVASS}_{\bar{0}}$ with $T_z = \emptyset$. The *elementary* fragment of ILL defined by Larchey-Wendling and Galmiche [2013] is another counterpart to ABVASS.

While allowing full zero tests is helpful in the reduction from LL provability, they can be dispensed with at little expense. Let us first introduce some notation. If node n is an ancestor of a node n' in a deduction tree \mathcal{D} , and the labels of n and n' are the same, we write $\mathcal{D}[n \leftarrow n']$ for the *shortening* of \mathcal{D} obtained by replacing the subtree of rule applications rooted at n by the one rooted at n' . Observe that, if \mathcal{D} is a reachability witness (resp. a coverability witness), then $\mathcal{D}[n \leftarrow n']$ is also a reachability witness (resp. a coverability witness).

LEMMA 3.3. *There is a logarithmic-space reduction from (lossy, resp. expansive) $\text{ABVASS}_{\bar{0}}$ reachability to (lossy, resp. expansive) ABVASS reachability.*

PROOF. Suppose \mathcal{A} is an $\text{ABVASS}_{\bar{0}}$ with set of states Q and dimension d .

For a logarithmic-space many-one reduction, the key observation is that, if there exists a witness for an instance of (lossy, resp. expansive) reachability for \mathcal{A} , then by repeated shortenings, there must be one in which, along every vertical path, the number of occurrences of full zero tests is at most $|Q| - 1$.

It therefore suffices to decide the problem for an ABVASS \mathcal{A}^\dagger whose set of states is $\{1, \dots, |Q|\} \times Q$, whose dimension is $|Q| \cdot d$, and which simulates \mathcal{A} up to $|Q| - 1$ full zero tests along any vertical path. In any state (i, q) , \mathcal{A}^\dagger behaves like \mathcal{A} in state q , but using the i th d -tuple of its vector components. To simulate a full zero test $q \xrightarrow{\bar{z}\bar{0}} q'$ in \mathcal{A} , \mathcal{A}^\dagger changes state from (i, q) to $(i + 1, q)$, postponing the check that the i th d -tuple of vector components are zero until the leaves of the deduction tree. \square

Remark 3.4 (Polynomial Time Turing Reduction). There is a polynomial time Turing reduction to the same effect. Its interest is that it preserves the dimension of the $\text{ABVASS}_{\bar{0}}$. Because the dimension is—by far—the most important source of complexity in our upper bounds, preserving it might be useful in some circumstances.

Let us first define the set of *root states* relative to a subset X of Q by

$$\text{Root}_{\mathcal{A}}(X) \stackrel{\text{def}}{=} \{q \in Q \mid \mathcal{A}, X \triangleright q, \bar{0}\} \quad (1)$$

as the set of states q such that there exists a deduction in \mathcal{A} with root label $(q, \bar{0})$ and leaf labels in $X \times \{0\}$. The (lossy, resp. expansive) reachability problem for $\langle \mathcal{A}, q_r, Q_\ell \rangle$ then reduces to checking whether q_r belongs to $\text{Root}_{\mathcal{A}}(Q_\ell)$.

Let $\mathcal{A} = \langle Q, d, T_u, T_f, T_s, T_z \rangle$. Writing \mathcal{A}' for the ABVASS $\langle Q, d, T_u, T_f, T_s, \emptyset \rangle$, we can compute $\text{Root}_{\mathcal{A}'}(X)$ using $|Q|$ calls to an oracle for (lossy, resp. expansive) ABVASS reachability. Moreover, since $\text{Root}_{\mathcal{A}'}(X) \supseteq X$ is monotone, we can use a least fixed point computation that discovers root states according to the number of full zero tests along the branches of their reachability witnesses:

$$\text{Root}_{\mathcal{A}}(Q_\ell) = \mu X. \text{Root}_{\mathcal{A}'}(Q_\ell) \cup \text{Root}_{\mathcal{A}'}(X \cup T_z^{-1}(X)). \quad (2)$$

This computation converges after at most $|Q|$ steps, and therefore works in polynomial time relative to the same oracle.

3.4. Computational Complexity

3.4.1. Non-Elementary Complexity Classes. We will use in this paper two complexity classes [see Schmitz 2013]:

$$\text{TOWER} \stackrel{\text{def}}{=} \bigcup_{e \in \text{FELEM}} \text{DTIME}(\text{tower}(e(n))) \quad (3)$$

is the class of problems that can be solved with a deterministic Turing machine in time tower of some elementary function e of the input, where $\text{tower}(0) \stackrel{\text{def}}{=} 1$ and $\text{tower}(n+1) \stackrel{\text{def}}{=} 2^{\text{tower}(n)}$ defines towers of exponentials. Similarly,

$$\text{ACKERMANN} \stackrel{\text{def}}{=} \bigcup_{p \in \text{FPR}} \text{DTIME}(\text{Ack}(p(n))) \quad (4)$$

is the class of problems solvable in time Ack of some primitive recursive function p of the input size, where “Ack” denotes the Ackermann function—any standard definition of Ack yields the same complexity class [Schmitz 2013].

Completeness for TOWER is understood relative to many-one elementary reductions, and completeness for ACKERMANN relative to many-one primitive-recursive reductions.

3.4.2. ABVASS₀ Complexity. For a set T_u of unary rules, we write $\max^-(T_u)$ (resp. $\max^+(T_u)$) for the largest absolute value of any negative (resp. positive) integer in a vector in T_u , and $\max(T_u)$ for their overall maximum. We assume a binary encoding of the vectors in unary rules, thus $\max(T_u)$ might be exponential in the size of the ABVASS₀. We can however reduce to *ordinary* ABVASS₀, i.e. ABVASS₀ with $\bar{u} = \bar{e}_i$ or $\bar{u} = -\bar{e}_i$ for some $0 < i \leq d$ whenever $q \xrightarrow{\bar{u}} q_1$ is a unary rule:

LEMMA 3.5. *There is a logarithmic space reduction from reachability in (lossy, resp. expansive) ABVASS₀ to reachability in (lossy, resp. expansive) ordinary ABVASS₀.*

PROOF IDEA. The idea is to encode each of the d coordinates of the original ABVASS₀ into $\lfloor \log(\max(T_u) + 1) \rfloor$ coordinates, and each unary rule to apply a binary encoding of \bar{u} to those new coordinates; see for instance [Schmitz 2010] where this construction is detailed for BVASS. The expansive case requires to first explicitly encode expansions as unary rules. \square

Lossy Case. One of the main results of this paper is the following:

THEOREM 3.6. *Reachability in lossy BVASS and lossy ABVASS₀ is TOWER-complete.*

PROOF. The upper bound is proved in Section 5. We present the hardness proof in detail in Section 6. \square

Note that Theorem 3.6 entails an improvement for BVASS reachability over the 2-EXSPACE lower bound of Lazić [2010].

Expansive Case. Regarding expansive ABVASS₀, we can adapt the proofs of Urquhart [1999] for expansive AVASS and the relevance calculus LR+ to show:

THEOREM 3.7. *Reachability in expansive AVASS and expansive ABVASS₀ is ACKERMANN-complete.*

PROOF. The lower bound is due to Urquhart [1999], who proved hardness of expansive AVASS reachability by a direct reduction from the halting problem of Minsky machines with counter values bounded by the Ackermann function. The upper bound

can be proved following essentially the same arguments as Urquhart’s for LR+, using length function theorems for Dickson’s Lemma [see e.g. Figueira et al. 2011]. See Section 7 for a proof. \square

Theorem 3.7 allows to derive the same ACKERMANN bounds for provability in MALLC and LLC, see Section 7.

3.5. ABVASS₀ Games

Reachability problems in ABVASS₀ can also be understood in a game-theoretic setting. Let us fix a reachability instance $\langle \mathcal{A}, q_r, Q_\ell \rangle$ and consider the following zero-sum two players game over the infinite arena $Q \times \mathbb{N}^d$, where d is the dimension of \mathcal{A} : its two players are called *Controller* and *Environment*. The game starts in the configuration $(q_r, \bar{0})$. In a current configuration (q, \bar{v}) , Controller chooses a rule of \mathcal{A} , which allows to apply one of the deduction rules of \mathcal{A} , or loses if none applies. In the case of a unary or full zero test rule, the current configuration changes to $(q_1, \bar{v} + \bar{u})$ and $(q_1, \bar{0})$ respectively. In the case of a fork rule, Environment chooses between a move to (q_1, \bar{v}) or (q_2, \bar{v}) . In the case of a split rule, Controller furthermore chooses two vectors \bar{v}_1, \bar{v}_2 in \mathbb{N}^d with $\bar{v}_1 + \bar{v}_2 = \bar{v}$ and Environment chooses between a move to (q_1, \bar{v}_1) or a move to (q_2, \bar{v}_2) .

The objective of Controller is to reach a configuration $(q_\ell, \bar{0})$ with q_ℓ in Q_ℓ ; the objective of Environment is to prevent it. It is easy to see that Controller has a winning strategy if and only if the original reachability instance was positive.

Increasing, expanding, or lossy reachability are straightforward to handle in this game setting. Interestingly, in the case of lossy reachability, we can take the full-reset semantics for T_z , and Controller’s objective can then be restated as reaching (q_ℓ, \bar{v}) for some q_ℓ in Q_ℓ and some vector \bar{v} in \mathbb{N}^d , i.e. as a state reachability objective. This game view is related to *multi-dimensional energy games* [Brázdil et al. 2010; Chatterjee et al. 2010; Abdulla et al. 2013], which are played on AVASS (defined in §3.3.1).

4. RELATIONSHIPS BETWEEN LL AND ABVASS₀

4.1. From LL to ABVASS₀

We proceed in two steps to show a reduction from LL provability to ABVASS₀ reachability: first, in §4.1.1, we recall a well-known reduction from LL provability to ILZ provability, and second, in §4.1.2, we exhibit a reduction from ILZ provability to ABVASS₀ reachability. The outcome will thus be:

PROPOSITION 4.1. *There are polynomial space reductions:*

- (1) *from (affine, resp. contractive) LL provability to (lossy, resp. expansive) ABVASS₀ reachability,*
- (2) *from (affine, resp. contractive) MELL provability to (lossy, resp. expansive) BVASS₀ reachability.*

4.1.1. *From LL to ILZ.* The Kolmogorov translation of classical logic into intuitionistic logic by double negation can be adapted to linear logic [Troelstra 1992]:

FACT 4.2. *There is a polynomial time reduction from (affine, resp. contractive) LL provability to (affine, resp. contractive) ILZ provability.*

PROOF IDEA. A translation of classical linear formulæ A into intuitionistic ones A^k is provided by Troelstra [1992, Section 5.12], which satisfies

$$\Gamma \vdash_{\text{LL}} A \quad \text{iff} \quad \Gamma^k \vdash_{\text{ILZ}} A^k. \quad (5)$$

The proof of this fact uses in particular that, for all A^k ,

$$\vdash_{\text{ILZ}} ((A^k \multimap \perp) \multimap \perp) \multimap A^k. \quad (6)$$

We merely need to check that the result also holds in presence of structural weakenings or structural contractions. Because the sequent calculi for ILZW and ILZC are restrictions of those for LLW and LLC, we only need to exhibit a translation of the structural rules of the two-sided sequent calculus for LLW and LLC into ILZW and ILZC proofs.

For structural weakenings, the two-sided sequent calculus for LLW has rules

$$\frac{\Gamma \vdash \Delta}{\Gamma, A \vdash \Delta} L_W \quad \frac{\Gamma \vdash \Delta}{\Gamma \vdash A, \Delta} R_W$$

In order to prove the affine version of (5), for (L_W) we need to restrict ourselves to $\Delta = B$ a single formula, and see that this is exactly the structural weakening of ILZW. For (R_W) we need to restrict ourselves to an empty Δ : then $\Gamma \vdash_{LLW}$ if and only if $\Gamma \vdash_{LLW} \perp$ and

$$\frac{\frac{(L_W) \frac{\Gamma^k \vdash_{ILZW} \perp}{\Gamma^k, A^k \multimap \perp \vdash_{ILZW} \perp}}{(R_{\multimap}) \frac{\Gamma^k \vdash_{ILZW} (A^k \multimap \perp) \multimap \perp}{\Gamma^k \vdash_{ILZW} \perp}}}{\Gamma^k \vdash_{ILZW} \perp}$$

which, together with $\vdash_{ILZW} ((A^k \multimap \perp) \multimap \perp) \multimap A^k$ for all A^k by (6), allows to conclude.

For structural contractions, the two-sided sequent calculus for LLC has rules

$$\frac{\Gamma, A, A \vdash \Delta}{\Gamma, A \vdash \Delta} L_C \quad \frac{\Gamma \vdash A, A, \Delta}{\Gamma \vdash A, \Delta} R_C$$

Again, for (L_C) we have $\Delta = B$ a single formula and it turns out to be exactly the structural contraction of ILZC. For (R_C) , necessarily Δ is empty. Then $\Gamma \vdash_{LLC} A, A$ if and only if $\Gamma, A \multimap \perp \vdash_{LLC} A$ and

$$\frac{\frac{(L_{\multimap}) \frac{\Gamma^k, A^k \multimap \perp \vdash_{ILZC} A^k \quad \frac{\perp \vdash_{ILZC}}{\perp \vdash_{ILZC}} (L_{\perp})}{\Gamma^k, A^k \multimap \perp, A^k \multimap \perp \vdash_{ILZC}}}{(R_{\perp}) \frac{\Gamma^k, A^k \multimap \perp, A^k \multimap \perp \vdash_{ILZC} \perp}{\Gamma^k, A^k \multimap \perp, A^k \multimap \perp \vdash_{ILZC} \perp}}}{(L_C) \frac{\Gamma^k, A^k \multimap \perp \vdash_{ILZC} \perp}{\Gamma^k, A^k \multimap \perp \vdash_{ILZC} \perp}}}{(R_{\multimap}) \frac{\Gamma^k \vdash_{ILZC} (A^k \multimap \perp) \multimap \perp}{\Gamma^k \vdash_{ILZC} \perp}}$$

which, together with $\vdash_{ILZC} ((A^k \multimap \perp) \multimap \perp) \multimap A^k$ for all A^k by (6), allows to conclude. \square

4.1.2. From ILZ to ABVASS₀. The key property of the sequent calculi for ILZ, ILZW, and ILZC we exploit in our reduction to ABVASS₀ is the subformula property of cut-free proofs.

Let us consider an instance of the provability problem for ILZ, i.e. some formula F . The subformula property allows us to view a sequent $!\Psi, \Delta \vdash A$ appearing in a cut-free proof of $\vdash F$ as a triple consisting of a multiset $!\Psi$ of $!$ -guarded subformulæ, a multiset Δ of subformulæ, and a subformula A —all subformulæ of the target formula F . Thanks to logical weakening ($!W$) and logical contraction ($!C$), we will even be able to treat $!\Psi$ as a *set*.

Let us write S for the set of subformulæ of F and $S_! \subseteq S$ for its $!$ -guarded subformulæ. We define from F an ABVASS₀ \mathcal{A}_F^I of dimension $|S|$ that includes $2^{S_!} \times (S \uplus \{\cdot\})$ in its state space, where “ \cdot ” is a fresh symbol. A configuration of \mathcal{A}_F^I in $2^{S_!} \times S \times \mathbb{N}^S$ encodes a sequent $!\Psi, \Delta \vdash A$ as $(\sigma(!\Psi), A, \Delta)$, where σ associates to a multiset its *support*, i.e. its set without duplicates—note that we completely identify multisets in \mathbb{N}^S with vectors in $\mathbb{N}^{|S|}$. A configuration in $(2^{S_!} \times \{\cdot\} \times \mathbb{N}^S)$ encodes a sequent $!\Psi, \Delta \vdash \sigma(!\Psi), \cdot, \Delta$. We also include a distinguished leaf state q_ℓ in the state space of \mathcal{A}_F^I . The

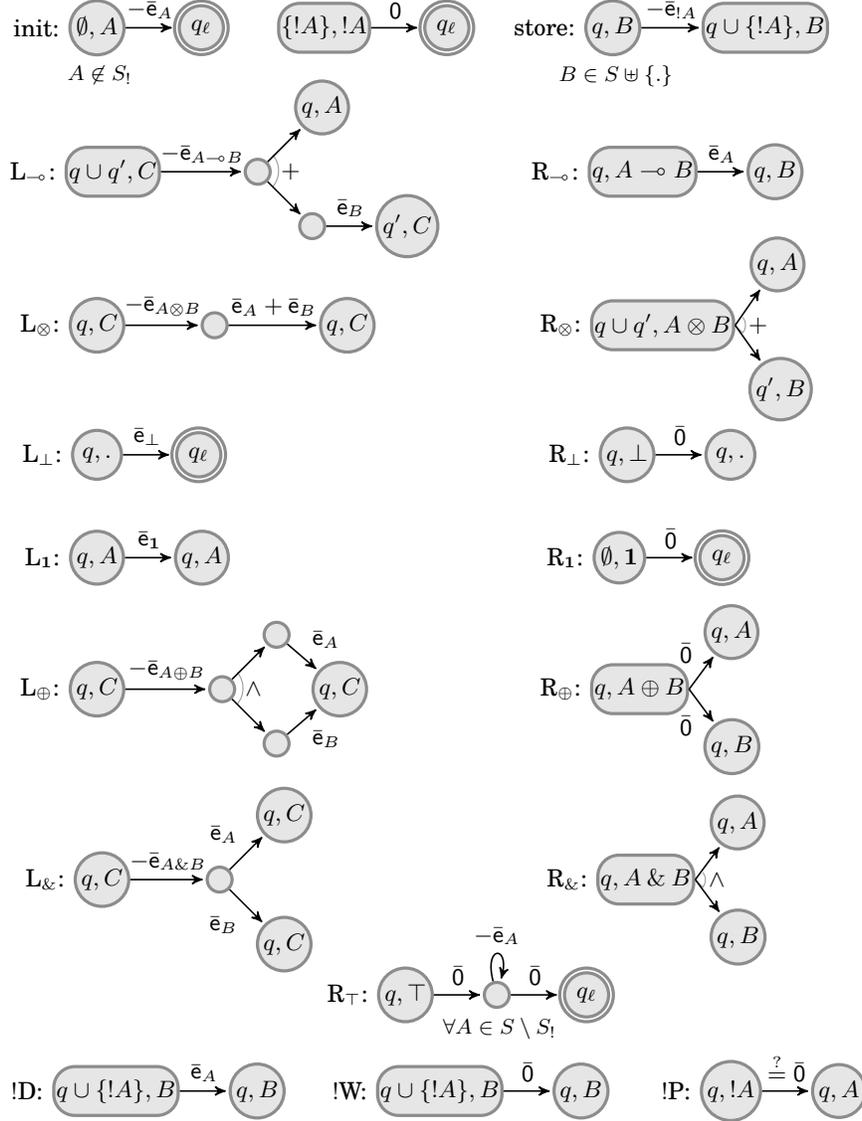


Fig. 3. The rules of \mathcal{A}_F^I ; q, q' are subsets of $S_!$, all the formulæ must be in S .

rules of \mathcal{A}_F^I implement the rules of ILZ on the encoded configurations in a straightforward manner—they rely on additional intermediate states for this—and are depicted in Figure 3. An additional *store* rule allows to move an “of-course” $!A$ formula from counters to state storage; we could compile it into the other rules at the expense of a larger number of cases.

For A empty or a formula in S , we write $A^\dagger \stackrel{\text{def}}{=} \cdot$ if A is empty and $A^\dagger \stackrel{\text{def}}{=} A$ otherwise. The following claim relates ILZ proofs with deductions in \mathcal{A}_F^I :

CLAIM 4.3.1 (\mathcal{A}_F^I IS SOUND AND COMPLETE). *For all $!\Psi$ in $\mathbb{N}^{S_!}$, Δ in $\mathbb{N}^{S \setminus S_!}$ and A^\dagger in $S \uplus \{\cdot\}$,*

$$\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Psi), A^\dagger, \Delta \text{ iff } !\Psi, \Delta \vdash_{\text{ILZ}} A.$$

COMPLETENESS PROOF. Let us prove by induction on the height of a proof tree for $!\Psi, \Delta \vdash_{\text{ILZ}} A$ that $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Psi), A^\dagger, \Delta$. This boils down to a verification that the rules in Figure 3 implement the sequent calculus for ILZ. We will not detail all the cases, but here are four instances for (init), (L_{\rightarrow}), (L_{\oplus}), and (!P)—the remaining cases being similar.

For (init), we know that $\mathcal{A}_F^I, \{q_\ell\} \triangleright q_\ell, \bar{0}$ vacuously. We then distinguish two cases: either A is not in $S_!$, and the first (init) unary rule applies and allows to deduce $\mathcal{A}_F^I, \{q_\ell\} \triangleright \emptyset, A, \bar{e}_A$ as desired, or A is in $S_!$, and the second (init) unary rule applies and allows to deduce $\mathcal{A}_F^I, \{q_\ell\} \triangleright \{A\}, A, \bar{0}$ as desired.

For (L_{\rightarrow}), let us write $!\Phi, \Gamma \vdash_{\text{ILZ}} A$ and $!\Psi, \Delta, B \vdash_{\text{ILZ}} C$ for the premises with $!\Phi$ and $!\Psi$ in $\mathbb{N}^{S_!}$, Γ and Δ in $\mathbb{N}^{S \setminus S_!}$, and A, B, C in S . By induction hypothesis, $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Phi), A, \Gamma$. If B is in $S_!$, then by induction hypothesis $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Psi) \cup B, C, \Delta$ and we can apply the store rule to show $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Phi), C, \Delta + \bar{e}_B$. Otherwise, i.e. if B is in $S \setminus S_!$, the induction hypothesis provides us with the same sequent directly. Applying the rules for (L_{\rightarrow}), we see that $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Phi) \cup \sigma(!\Psi), C, \Gamma + \Delta + \bar{e}_{A \rightarrow B}$ as desired.

For (L_{\oplus}), let us write $!\Phi, \Gamma, A \vdash_{\text{ILZ}} C$ and $!\Phi, \Gamma, B \vdash_{\text{ILZ}} C$ for the premises with $!\Phi$ in $\mathbb{N}^{S_!}$, Γ in $\mathbb{N}^{S \setminus S_!}$, and A, B, C in S . Like in the previous argument for (L_{\rightarrow}), we can use the store rule if A or B are in $S_!$, and use in any case the induction hypothesis shows $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Phi), C, \Gamma + \bar{e}_A$ and $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Phi), C, \Gamma + \bar{e}_B$. The ABVASS $_{\bar{0}}$ rules for (L_{\oplus}) then allow to remove \bar{e}_A and \bar{e}_B from these two configurations, apply the fork rule, and finally add $\bar{e}_{A \oplus B}$ to prove $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Phi), C, \Gamma + \bar{e}_{A \oplus B}$ as desired.

For (!P), by induction hypothesis $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Gamma), A, \bar{0}$ and we can apply the corresponding full zero test to show $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Gamma), !A, \bar{0}$ as desired. \square

SOUNDNESS PROOF. As a preliminary observation, note that the store rule of \mathcal{A}_F^I is the only rule that can decrement the counter of a formula from $S_!$. By induction over the height of deduction trees for \mathcal{A}_F^I , we can normalise deductions so that store rules are applied either immediately after a rule that added $\bar{e}_{!A}$ to the current configuration, or immediately at the root of the deduction (if F itself is in $S_!$). This means that we can assume Δ in $\mathbb{N}^{S \setminus S_!}$ in a root judgement $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Psi), A^\dagger, \Delta$ as in the statement of the claim.

Let us prove by induction on the height of a deduction tree for $\mathcal{A}_F^I, \{q_\ell\} \triangleright \sigma(!\Psi), A^\dagger, \Delta$ that $!\Psi, \Delta \vdash_{\text{ILZ}} A$. Again, we only cover a few cases, depending on which group of rules of \mathcal{A}_F^I was applied last:

For (init), either the first variant for A in $S \setminus S_!$ was used to obtain $\mathcal{A}_F^I, \{q_\ell\} \triangleright \emptyset, A, \bar{e}_A$, and we have $A \vdash_{\text{ILZ}} A$ as desired, or the second variant for $!A$ in $S_!$ was used to obtain $\mathcal{A}_F^I, \{q_\ell\} \triangleright !A, !A, \bar{0}$, and we have $!A \vdash_{\text{ILZ}} !A$ as desired.

For (L_{\rightarrow}), we know that $\mathcal{A}_F^I, \{q_\ell\} \triangleright q, A, \Gamma$ and $\mathcal{A}_F^I, \{q_\ell\} \triangleright q', C, \Delta + \bar{e}_B$ for some q and q' included in $S_!$, some Γ and Δ in $\mathbb{N}^{S \setminus S_!}$, and some A, B , and C in S . By induction hypothesis, there exists $!\Phi$ in $\mathbb{N}^{S_!}$ with $q = \sigma(!\Phi)$ such that $!\Phi, \Gamma \vdash_{\text{ILZ}} A$. If B is in $S_!$ —and is therefore the result of a store rule applied right after—, then $\mathcal{A}_F^I, \{q_\ell\} \triangleright q' \cup \{B\}, C, \Delta$ and by induction hypothesis there exists $!\Psi$ in $\mathbb{N}^{S_!}$ with $\sigma(!\Psi) = q'$ such that $!\Psi, B, \Delta \vdash_{\text{ILZ}} C$. Otherwise, i.e. if B is in $S \setminus S_!$, we obtain the latter sequent directly by induction hypothesis. Then $!\Psi, !\Phi, B, \Delta, \Gamma, A \rightarrow B \vdash_{\text{ILZ}} C$ as desired.

For (L_{\oplus}), we know that $\mathcal{A}_F^I, \{q_\ell\} \triangleright q, C, \Gamma + \bar{e}_A$ and $\mathcal{A}_F^I, \{q_\ell\} \triangleright q, C, \Gamma + \bar{e}_B$ for some q included in $S_!$, some Γ in $\mathbb{N}^{S \setminus S_!}$, and some A, B , and C in S . Using store rules, we can argue as in the case of (L_{\rightarrow}) that, regardless of whether A or B is in $S_!$, by induction

hypothesis there exists $!Φ$ in $\mathbb{N}^{S_!}$ with $q = \sigma(!Φ)$ such that $!Φ, A, \Gamma \vdash_{\text{ILZ}} C$ and $!Φ, B, \Gamma \vdash_{\text{ILZ}} C$. Therefore $!Φ, A \oplus B, \Gamma \vdash_{\text{ILZ}} C$ as desired.

For (!P), we know that $\mathcal{A}_F^I, \{q_\ell\} \triangleright q, A, \bar{0}$, thus by induction hypothesis there exists $!Ψ$ in $\mathbb{N}^{S_!}$ with $q = \sigma(!Ψ)$ and $!Ψ \vdash_{\text{ILZ}} A$, hence $!Ψ \vdash_{\text{ILZ}} !A$ as desired. \square

CLAIM 4.3.2 (AFFINE CASE). *When allowing losses in \mathcal{A}_F^I , for all $!Ψ$ in $\mathbb{N}^{S_!}$, Δ in $\mathbb{N}^{S \setminus S_!}$ and A^\dagger in $S \uplus \{\cdot\}$,*

$$\mathcal{A}_F^I, \{q_\ell\} \triangleright_\ell \sigma(!Ψ), A^\dagger, \Delta \quad \text{iff} \quad !Ψ, \Delta \vdash_{\text{ILZW}} A.$$

PROOF. As a preliminary observation, note that, by monotonicity, losses occurring inside a group of rules depicted in Figure 3 can be delayed until after the execution of the group is completed. By Claim 4.3.1, it therefore suffices to check the case of the loss and structural weakening rules.

For completeness, if (W) is the last applied rule in a proof of $!Ψ, B, \Delta \vdash_{\text{ILZW}} A$, then, by induction hypothesis $\mathcal{A}_F^I, \{q_\ell\} \triangleright_\ell \sigma(!Ψ), A, \Delta$, and an application of the loss rule yields $\mathcal{A}_F^I, \{q_\ell\} \triangleright_\ell \sigma(!Ψ), A, \Delta + \bar{e}_B$ as desired.

For soundness, if a loss of some B is the last applied rule in a deduction showing $\mathcal{A}_F^I, \{q_\ell\} \triangleright_\ell q, A, \Delta + \bar{e}_B$, then $\mathcal{A}_F^I, \{q_\ell\} \triangleright_\ell q, A, \Delta$. By induction hypothesis there exists $!Ψ$ with $q = \sigma(!Ψ)$ such that $!Ψ \vdash_{\text{ILZW}} A$, from which (W) yields $!Ψ, B, \Delta \vdash_{\text{ILZW}} A$ as desired. \square

CLAIM 4.3.3 (CONTRACTIVE CASE). *When allowing expansions in \mathcal{A}_F^I , for all $!Ψ$ in $\mathbb{N}^{S_!}$, Δ in $\mathbb{N}^{S \setminus S_!}$ and A^\dagger in $S \uplus \{\cdot\}$,*

$$\mathcal{A}_F^I, \{q_\ell\} \triangleright_e \sigma(!Ψ), A^\dagger, \Delta \quad \text{iff} \quad !Ψ, \Delta \vdash_{\text{ILZC}} A.$$

PROOF. As a preliminary observation, note that, by monotonicity, expansions occurring inside a group of rules depicted in Figure 3 can be applied before the execution of the group is started. By Claim 4.3.1, it therefore suffices to check the case of the expansion and structural contraction rules.

For completeness, if (C) is the last applied rule in a proof of $!Ψ, B, \Delta \vdash_{\text{ILZC}} A$, then we can assume that the contracted formula was some B in $S \setminus S_!$ as otherwise logical weakening would have sufficed, thus $!Ψ, B, B, \Delta \vdash_{\text{ILZW}} A$. By induction hypothesis, $\mathcal{A}_F^I, \{q_\ell\} \triangleright_e \sigma(!Ψ), A, \Delta + 2\bar{e}_B$, and an application of the expansion deduction rule yields $\mathcal{A}_F^I, \{q_\ell\} \triangleright_e \sigma(!Ψ), A, \Delta$ as desired.

For soundness, assume that an expansion is the rule applied at the root of a deduction tree for $\mathcal{A}_F^I, \{q_\ell\} \triangleright_e q, A, \Delta + \bar{e}_B$, hence that $\mathcal{A}_F^I, \{q_\ell\} \triangleright_e q, A, \Delta + 2\bar{e}_B$. Because we assume store rules to occur as early as possible, B cannot be in $S_!$. Thus, by induction hypothesis there exists $!Ψ$ with $q = \sigma(!Ψ)$ and $!Ψ, B, B, \Delta \vdash_{\text{ILZC}} A$, and applying (C) yields $!Ψ, B, \Delta \vdash_{\text{ILZC}} A$ as desired. \square

PROPOSITION 4.3. *There are polynomial space reductions:*

- (1) *from (affine, resp. contractive) ILZ provability to (lossy, resp. expansive) ABVASS₀ reachability,*
- (2) *from (affine, resp. contractive) IMELZ provability to (lossy, resp. expansive) BVASS₀ reachability.*

PROOF. For 1, we reduce the provability of $\vdash F$ to the reachability of (\emptyset, F) in \mathcal{A}_F^I , which is correct thanks to the subformula property and claims 4.3.1–4.3.3.

For 2, simply observe that (L_\oplus) and ($R_\&$) are the only rules of ILZ that make use of fork rules in \mathcal{A}_F^I . \square

Our reductions incur an exponential blow-up in the number of states—however, as we will see with our complexity upper bounds, this is not an issue, because the main

source of complexity in $ABVASS_0$ is, by far, the dimension of the system, which is here linear in $|F|$.

4.2. From $ABVASS_0$ to LL

In order to exhibit a reduction from $ABVASS_0$ reachability to LL provability, we extend a similar reduction proved by Lincoln, Mitchell, Scedrov, and Shankar [1992] in the case of AVASS (also employed by Urquhart [1999]). The general idea is to encode $ABVASS_0$ configurations as sequents and $ABVASS_0$ deductions as proofs in LL extended with a *theory*, where encoded $ABVASS_0$ rules are provided as an additional set of non-logical axioms.

4.2.1. Linear Logic with a Theory. In the framework of Lincoln et al., a theory T is a finite set of *axioms* $C, p_1^\perp, \dots, p_m^\perp$ where C is a MALL formula and each p_i is an atomic proposition. Proofs in $LL+T$ can employ two new rules

$$\frac{}{\vdash C, p_1^\perp, \dots, p_m^\perp} T \quad \frac{\vdash C, p_1^\perp, \dots, p_m^\perp \quad \vdash C^\perp, \Delta}{\vdash p_1^\perp, \dots, p_m^\perp, \Delta} \text{ directed cut}$$

where $C, p_1^\perp, \dots, p_m^\perp$ belongs to T .

A proof in $LL+T$ is *directed* if all its cuts are *directed cuts*. By adapting the LL cut-elimination proof, Lincoln et al. show:

FACT 4.4 ([LINCOLN ET AL. 1992]). *If there is a proof of $\vdash \Gamma$ in $LL+T$, then there is a directed proof of $\vdash \Gamma$ in $LL+T$.*

The axioms of a theory T can be translated in pure LL by

$$\ulcorner C, p_1^\perp, \dots, p_m^\perp \urcorner \stackrel{\text{def}}{=} C^\perp \otimes p_1 \otimes \dots \otimes p_m. \quad (7)$$

FACT 4.5 ([LINCOLN ET AL. 1992]). *For any finite set of axioms T , $\vdash \Gamma$ is provable in $LL+T$ if and only if $\ulcorner T \urcorner, \Gamma$ is provable in LL.*

4.2.2. Encoding $ABVASS_0$. Given an $ABVASS \mathcal{A} = \langle Q, d, T_u, T_f, T_s, \emptyset \rangle$, a configuration (q, \bar{v}) in $Q \times \mathbb{N}^d$ is encoded as the sequent

$$\theta(q, \bar{v}) \stackrel{\text{def}}{=} \vdash q^\perp, (e_1^\perp)^{\bar{v}(1)}, \dots, (e_d^\perp)^{\bar{v}(d)} \quad (8)$$

where $Q \uplus \{e_i \mid i = 1, \dots, d\}$ is included in the set of atomic propositions and A^n stands for the formula A repeated n times.

By Lemma 3.5 we assume \mathcal{A} to be in ordinary form. We construct from the rules of \mathcal{A} a theory T consisting of sequents of form $\vdash q^\perp, c_1^\perp, \dots, c_m^\perp, C$ with q in Q the originating state, c_j in $\{e_i \mid 0 < i \leq d\}$, and C a MALL formula containing the destination state(s) positively. Here are the axioms corresponding to each type of rule:

$$\begin{array}{ll} q \xrightarrow{\bar{e}_i} q_1 & q^\perp, q_1 \otimes e_i \\ q \xrightarrow{-\bar{e}_i} q_1 & q^\perp, e_i^\perp, q_1 \\ q \rightarrow q_1 \wedge q_2 & q^\perp, q_1 \oplus q_2 \\ q \rightarrow q_1 + q_2 & q^\perp, q_1 \wp q_2 \end{array}$$

By Lemma 3.3, we do not need to consider the case of full zero tests. Here is nevertheless how they could be encoded, provided we slightly extended the reduction of $LL+T$ to LL in Fact 4.5 to allow exponentials in T :

$$q \xrightarrow{\bar{0}} q_1 \quad q^\perp, !q_1$$

CLAIM 4.6.1. *For all (q, \bar{v}) in $Q \times \mathbb{N}^d$, $\mathcal{A}, Q_\ell \triangleright q, \bar{v}$ if and only if $\vdash \theta(q, \bar{v}), ?Q_\ell$ in $LL+T$.*

PROOF. The AVASS case is proved by Lincoln et al. [1992, Lemmata 3.5 and 3.6] by induction on the height of deduction trees in \mathcal{A} and the number of directed cuts in a directed proof in $LL+T$ (with minor adaptations for $?Q_\ell$). Thus, we only need to prove that split rules preserve this statement.²

Assume for the direct implication that $\mathcal{A}, Q_\ell \triangleright q, \bar{v}$ as the result of a split rule $q \rightarrow q_1 + q_2$, thus $\bar{v} = \bar{v}_1 + \bar{v}_2$ and $\mathcal{A}, Q_\ell \triangleright q_1, \bar{v}_1$ and $\mathcal{A}, Q_\ell \triangleright q_2, \bar{v}_2$. By induction hypothesis, $\vdash \theta(q_1, \bar{v}_1), ?Q_\ell$ and $\vdash \theta(q_2, \bar{v}_2), ?Q_\ell$, and we have the following proof of $\vdash \theta(q, \bar{v}), ?Q_\ell$:

$$\begin{array}{c}
 \text{i.h.} \qquad \qquad \qquad \text{i.h.} \\
 \frac{\vdash q_1^\perp, (c_1^\perp)^{\bar{v}_1(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)}, ?Q_\ell}{\vdash q_1^\perp \otimes q_2^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell, ?Q_\ell} \quad \frac{\vdash q_2^\perp, (c_1^\perp)^{\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_2(d)}, ?Q_\ell}{\vdash q_1^\perp \otimes q_2^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell, ?Q_\ell} \\
 \text{(\otimes)} \quad \frac{\vdash q_1^\perp \otimes q_2^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell, ?Q_\ell}{\vdash q_1^\perp \otimes q_2^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell} \quad \vdash q^\perp, q_1 \wp q_2 \\
 \text{(?C)} \quad \frac{\vdash q_1^\perp \otimes q_2^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell}{\vdash q^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell} \\
 \text{(dir. cut)} \quad \frac{\vdash q^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell}{\vdash q^\perp, (c_1^\perp)^{\bar{v}_1(1)+\bar{v}_2(1)}, \dots, (c_d^\perp)^{\bar{v}_1(d)+\bar{v}_2(d)}, ?Q_\ell}
 \end{array}$$

Conversely, assume that the last applied directed cut has

$$\vdash q_1^\perp \otimes q_2^\perp, (c_1^\perp)^{\bar{v}(1)}, \dots, (c_d^\perp)^{\bar{v}(d)}, ?Q_\ell \quad (9)$$

and $\vdash q^\perp, q_1 \wp q_2$ as premises. The only rules that allow to prove (9) are (?D), (?C) or (?W) applied to some q_ℓ in Q_ℓ , and (\otimes). Logical contractions are irrelevant to the claim, and wlog. we can apply derelictions above (\otimes), thus we know that (9) is the result of (\otimes) followed by a series of (?W). Hence $\vdash \theta(q_1, \bar{v}_1), ?Q_1$ and $\vdash \theta(q_2, \bar{v}_2), ?Q_2$ with $\bar{v} = \bar{v}_1 + \bar{v}_2$ and $Q_\ell \supseteq Q_1 \cup Q_2$. By induction hypothesis, $\mathcal{A}, Q_1 \triangleright q_1, \bar{v}_1$ and $\mathcal{A}, Q_2 \triangleright q_2, \bar{v}_2$. Because $Q_1 \subseteq Q_\ell$ and $Q_2 \subseteq Q_\ell$ this entails $\mathcal{A}, Q_\ell \triangleright q_1, \bar{v}_1$ and $\mathcal{A}, Q_\ell \triangleright q_2, \bar{v}_2$, from which a split allows to derive $\mathcal{A}, Q_\ell \triangleright q, \bar{v}$ as desired. \square

PROPOSITION 4.6. *There are logarithmic space reductions*

- (1) *from $ABVASS_0$ reachability to LL provability and*
- (2) *from $BVASS_0$ reachability to $MELL$ provability.*

PROOF. By Lemma 3.3 we can eliminate full zero tests. For 1, by Claim 4.6.1 and Fact 4.5, $\mathcal{A}, Q_\ell \triangleright q_r, 0$ if and only if $\vdash q_r^\perp, ?Q_\ell, ?\ulcorner T \urcorner$. Regarding 2, simply observe that additive connectives are only used for the encoding of fork rules. \square

4.2.3. Affine Case. Adapting the proof of Proposition 4.6 to the affine case is relatively straightforward. For starters, Fact 4.4 also holds for $LLW+T$ using the cut elimination procedure for LLW , and allowing structural weakenings does not influence the proof of Fact 4.5 in [Lincoln et al. 1992, Lemmata 3.2 and 3.3]. We show:

PROPOSITION 4.7. *There are logarithmic space reductions*

- (1) *from $ABVASS_0$ lossy reachability to LLW provability and*
- (2) *from $BVASS_0$ lossy reachability to $MELLW$ provability.*

This relies on an extension of Claim 4.6.1:

CLAIM 4.7.1. *For all (q, \bar{v}) in $Q \times \mathbb{N}^d$, $\mathcal{A}, Q_\ell \triangleright_\ell q, \bar{v}$ with lossy semantics if and only if $\vdash \theta(q, \bar{v}), ?Q_\ell$ in $LLW+T$.*

PROOF. We proceed as before by induction on the height of a deduction tree in \mathcal{A} and on the number of directed cuts in a proof in $LLW+T$. The only new cases to consider

²De Groote et al. [2004] show how to handle split rules in IMELL, but they do not rely on the $LL+T$ framework, which motivates considering this case here.

in addition to those of Claim 4.6.1 are those of losses and structural weakenings. In case of a loss allowing to derive $\mathcal{A}, Q_\ell \triangleright_\ell q, \bar{v} + \bar{e}_i$, by induction hypothesis $\vdash \theta(q, \bar{v}), ?Q_\ell$ and a structural weakening yields $\vdash \theta(q, \bar{v} + \bar{e}_i), ?Q_\ell$ as desired. Conversely, in case of a structural weakening allowing to derive $\vdash \theta(q, \bar{v}), ?Q_\ell$, either the weakened formula is some $?q_\ell$ guarded by $?$ and by induction hypothesis $\mathcal{A}, Q_\ell \setminus \{q_\ell\} \triangleright_\ell q, \bar{v}$ thus $\mathcal{A}, Q_\ell \triangleright_\ell q, \bar{v}$ as desired, or the weakened formula is some c_i^\perp and by induction hypothesis $\mathcal{A}, Q_\ell \triangleright_\ell (q, \bar{v} - \bar{e}_i)$ and a loss allows to derive $\mathcal{A}, Q_\ell \triangleright_\ell q, \bar{v}$ as desired. \square

4.2.4. Contractive Case. Again, Fact 4.4 is straightforward to adapt to LLC+T using cut elimination. Fact 4.5 can be strengthened to avoid exponentials in the contractive case:

LEMMA 4.8. *For a finite set of axioms T , $\vdash \Gamma$ is provable in LLC+T if and only if $\vdash \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \Gamma$ is provable in LLC.*

PROOF. For the direct implication, we consider a directed proof of $\vdash_{\text{LLC}+T} \Gamma$. By induction on the number of directed cuts, we build an LLC proof of $\vdash_{\text{LLC}} \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \Gamma$. For the base case, an LLC+T proof of $\vdash_{\text{LLC}+T} \Gamma$ without directed cuts is also an LLC proof of $\vdash_{\text{LLC}} \Gamma$, thus $\vdash_{\text{LLC}} \perp, \Gamma$ using the (\perp) rule, and $\vdash \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \Gamma$ by $|T|$ applications of (\oplus) . For the induction step, consider a directed cut of an axiom $t = C, p_1^\perp, \dots, p_m^\perp$ in T with $\vdash_{\text{LLC}+T} C^\perp, \Delta$. We have $\vdash_{\text{LLC}} C, C^\perp$ and $\vdash_{\text{LLC}} p_i, p_i^\perp$ for all $0 < i \leq m$ by the (init) rule, and $m+1$ applications of (\otimes) yield $\vdash_{\text{LLC}} t, \ulcorner t \urcorner$. By induction hypothesis $\vdash_{\text{LLC}} \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, C^\perp, \Delta$, thus a (normal) cut yields $\vdash_{\text{LLC}} \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \ulcorner t \urcorner, p_1^\perp, \dots, p_m^\perp, \Delta$. Using $|T|$ applications of (\oplus) allows to prove $\vdash_{\text{LLC}} \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, p_1^\perp, \dots, p_m^\perp, \Delta$ and a structural contraction yields the desired LLC proof.

For the converse implication, if $\vdash_{\text{LLC}} \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \Gamma$, then $\vdash_{\text{LLC}+T} \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, \Gamma$. Then $\vdash_{\text{LLC}+T} \mathbf{1}$, and for each axiom $t = C, p_1^\perp, \dots, p_m^\perp$ in T , we can prove $\vdash_{\text{LLC}+T} C \wp p_1^\perp \wp \dots \wp p_m^\perp$ by m applications of (\wp) from $\vdash_{\text{LLC}+T} t$, i.e. $\vdash_{\text{LLC}+T} \ulcorner t \urcorner^\perp$. Thus $|T|$ applications of $(\&)$ yield $\vdash_{\text{LLC}+T} \mathbf{1} \& \&_{t \in T} \ulcorner t \urcorner^\perp$, and a (normal) cut shows $\vdash_{\text{LLC}+T} \Gamma$. \square

Without loss of generality, we can assume that $Q_\ell = \{q_\ell\}$ for a state q_ℓ with no applicable rule in \mathcal{A} . We extend Claim 4.6.1 and Proposition 4.6 to the contractive case:

CLAIM 4.9.1. *For all (q, \bar{v}) in $Q \times \mathbb{N}^d$, $\mathcal{A}, \{q_\ell\} \triangleright_e q, \bar{v}$ using expansive semantics if and only if $\vdash \theta(q, \bar{v}), q_\ell^s$ in LLC+T for some $s > 0$.*

PROOF. By Claim 4.6.1, it suffices to consider the case of expansions and structural contractions in a proof by induction over deduction tree height and number of directed cuts. In case of an expansion allowing to derive $\mathcal{A}, \{q_\ell\} \triangleright_e q, \bar{v} + \bar{e}_i$, by induction hypothesis, $\vdash \theta(q, \bar{v} + 2\bar{e}_i), q_\ell^s$ and a structural contraction allows to prove $\vdash \theta(q, \bar{v} + \bar{e}_i), q_\ell^s$ as desired. Conversely, in case of a structural contraction proving $\vdash \theta(q, \bar{v}), q_\ell^s$, several cases are possible. If the contracted formula is q_ℓ , then by induction hypothesis $\mathcal{A}, \{q_\ell\} \triangleright_e q, \bar{v}$ as desired. If the contracted formula is some e_i^\perp with $0 < i \leq d$, then by induction hypothesis $\mathcal{A}, \{q_\ell\} \triangleright_e q, \bar{v} + 2\bar{e}_i$ and an expansion allows to deduce $\mathcal{A}, \{q_\ell\} \triangleright_e q, \bar{v} + \bar{e}_i$ as desired. Last of all, the contracted formula cannot be q^\perp : assume for the sake of contradiction that $\vdash q_1^\perp, \dots, q_n^\perp, \theta(q, \bar{v}), q_\ell$ were provable in LLC+T for some $n > 0$ negated atomic state propositions $q_1^\perp, \dots, q_n^\perp$ (in addition to q^\perp), and attempt to perform directed proof search. The only applicable rules are

- structural contraction, which cannot decrease n , and
- directed cuts using T , which also preserve n .

In the absence of any axiom allowing $n > 0$, this sequent is not provable. \square

PROPOSITION 4.9. *There is a logarithmic space reduction from $ABVASS_0$ expansive reachability to MALLC provability.*

PROOF. As usual, we start by eliminating full zero tests using Lemma 3.3. Let $\langle \mathcal{A}, q_r, \{q_\ell\} \rangle$ be an expansive reachability instance. By Claim 4.9.1 and Lemma 4.8 $\mathcal{A}, \{q_\ell\} \triangleright_e q_r, \bar{0}$ if and only if $\vdash \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, q_r^\perp, q_\ell^s$ for some $s > 0$, which by structural contractions on q_ℓ happens if and only if $\vdash \perp \oplus \bigoplus_{t \in T} \ulcorner t \urcorner, q_r^\perp, q_\ell$. \square

5. TOWER UPPER BOUNDS

To show that the reachability problem for lossy $ABVASS_0$ is in TOWER, we establish by induction over the dimension d a bound on the height of minimal reachability witnesses, following in this the reasoning used by Rackoff [1978] to show that the coverability problem for VASS is in EXPSpace. The main new idea here is that, where there is freedom to choose how values of vector components are distributed when performing split rules top-down (see Section 3.1), splitting them equally (or with the difference of 1) allows sufficient lower bounds to be established along vertical paths in deduction trees for the inductive argument to go through. Since the bounds we obtain on the heights of smallest witnessing deduction trees are exponentiated at every inductive step (rather than multiplied as in Rackoff's proof), the resulting complexity upper bound involves a tower of exponentials, but will be shown broadly optimal in Section 6.

The following lemma in fact addresses the equivalent top-down coverability problem (see §3.2.2), and considers systems without full resets thanks to Lemma 3.3. We first define some terminology. We say that a deduction tree is:

- (q_r, \bar{v}_0) -rooted iff that is the label of its root;
- Q_ℓ -leaf-covering iff, for every leaf label (q, \bar{v}) , we have $q \in Q_\ell$;
- of height h iff that is the maximum number of edges, i.e. the maximum number of rule applications, along any path from the root to a leaf.

For integers $d, m \geq 0$ and $s \geq 1$, we define a natural number $H(d, s, m)$ recursively:

$$H(0, s, m) \stackrel{\text{def}}{=} s, \quad (10)$$

$$H(d+1, s, m) \stackrel{\text{def}}{=} s(m \cdot 2^{H(d, s, m)})^{d+1} + H(d, s, m). \quad (11)$$

LEMMA 5.1. *If an $ABVASS \mathcal{A} = \langle Q, d, T_u, T_f, T_s, \emptyset \rangle$ has a (q_r, \bar{v}_0) -rooted Q_ℓ -leaf-covering deduction tree, then it has such a deduction tree of height at most $H(d, |Q|, \max^-(T_u))$.*

PROOF. We use induction on the dimension d .

For the base case, if \mathcal{A} is 0-dimensional, then the labels in its deduction trees are states only. Starting with a deduction tree whose root label is q_r and whose every leaf label is in Q_ℓ , we obtain by repeated shortenings a deduction tree in which labels along every branch are mutually distinct, with height at most $|Q| - 1$.

For the induction step in dimension $d + 1$, suppose that $\mathcal{A} = \langle Q, d + 1, T_u, T_f, T_s, \emptyset \rangle$, and \mathcal{D} is a (q_r, \bar{v}_0) -rooted Q_ℓ -leaf-covering deduction tree. Let

$$B \stackrel{\text{def}}{=} 2^{H(d, |Q|, \max^-(T_u))} \cdot \max^-(T_u), \quad (12)$$

and let $\{n_1, \dots, n_k\}$ be the set of all nodes of \mathcal{D} such that, for all i , we have:

- all vector components in labels of ancestors of n_i are smaller than B ;
- for some $0 < j_i \leq d + 1$, we have $\bar{v}_i(j_i) \geq B$, where the label of n_i is (q_i, \bar{v}_i) .

By repeated shortenings, we can assume that the length (i.e., the number of edges) of every path in \mathcal{D} , which is from the root either to some n_i or to a leaf with no n_i

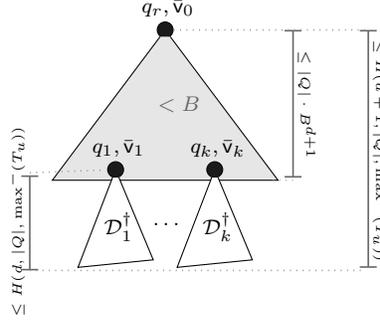


Fig. 4. Induction step in the proof of Lemma 5.1.

ancestor, is at most $|Q| \cdot B^{d+1}$, the number of possible labels with all vector components smaller than B .

In the remainder of the argument, we apply the induction hypothesis below each of the nodes n_i . More precisely, let \mathcal{A}_i denote the d -dimensional ABVASS obtained from \mathcal{A} by projecting onto vector indices $\{1, \dots, d+1\} \setminus \{j_i\}$. (The only change is in the set of unary rules.) From the subtree of \mathcal{D} rooted at n_i , we know that \mathcal{A}_i has a $(q_i, \bar{v}_i(-j_i))$ -rooted Q_ℓ -leaf-covering deduction tree. (Here $\bar{w}(-j)$ denotes the projection of \bar{w} to all indices except j .) Let \mathcal{D}_i be such a deduction tree, which we can choose of height at most $H(d, |Q|, \max^-(T_u))$ by induction hypothesis.

Now, to turn \mathcal{D}_i into a (q_i, \bar{v}_i) -rooted deduction tree \mathcal{D}_i^\dagger of \mathcal{A} , we have to do two things:

- (1) For every application of a unary rule $q \xrightarrow{\bar{u}} q'$ in \mathcal{D}_i , decide which unary rule $q \xrightarrow{\bar{u}'} q'$ of \mathcal{A} such that $\bar{u} = \bar{u}'(-j_i)$ to apply: we do that arbitrarily.
- (2) For every application of a split rule $q \rightarrow q' + q''$ in \mathcal{D}_i , decide how to split the vector component x with index j_i : we do that by balancing, i.e. picking the corresponding components x_1 and x_2 of the two child vectors so that $|x_1 - x_2| \leq 1$.

We claim that \mathcal{D}_i^\dagger thus obtained is indeed a (q_i, \bar{v}_i) -rooted Q_ℓ -leaf-covering deduction tree of \mathcal{A} . Since the node labels in \mathcal{D}_i^\dagger differ from those in \mathcal{D}_i only by the extra j_i th components, it suffices to show that all the latter are non-negative. In fact, at the root of \mathcal{D}_i^\dagger , we have $\bar{v}_i(j_i) \geq B$, and it follows by a straightforward induction that, for every node n in \mathcal{D}_i^\dagger whose distance from the root is h (which is at most $H(d, |Q|, \max^-(T_u))$), its vector label \bar{w} satisfies

$$\bar{w}(j_i) \geq 2^{H(d, |Q|, \max^-(T_u)) - h} \cdot \max^-(T_u). \quad (13)$$

It remains to observe that, by replacing for each $0 < i \leq k$, the subtree of \mathcal{D} rooted at n_i by \mathcal{D}_i^\dagger , the height of the resulting deduction tree (see Figure 4 for a depiction) is at most

$$|Q| \cdot B^{d+1} + H(d, |Q|, \max^-(T_u)) = H(d+1, |Q|, \max^-(T_u)),$$

thereby establishing the lemma. \square

The following auxiliary function and proposition will be useful for deriving the complexity upper bounds. Let

$$H'(d, s, m) \stackrel{\text{def}}{=} 4(d+1)(s+m+1)H(d, s, m). \quad (14)$$

PROPOSITION 5.2. *For all $d, m \geq 0$ and $s \geq 1$, we have:*

$$H'(d+1, s, m) \leq 2^{H'(d,s,m)} .$$

PROOF. We first observe the following inequality involving the H function:

$$\begin{aligned} H(d+1, s, m) &= s(m \cdot 2^{H(d,s,m)})^{d+1} + H(d, s, m) \\ &\leq s((m+1) \cdot 2^{H(d,s,m)})^{d+1} \\ &\leq 2^{(d+1)(s+m+H(d,s,m))} \\ &\leq 2^{(d+1)(s+m+1)H(d,s,m)} , \end{aligned}$$

and then use it to conclude that:

$$\begin{aligned} H'(d+1, s, m) &= 4(d+2)(s+m+1)H(d+1, s, m) \\ &\leq 4(d+2)(s+m+1)2^{(d+1)(s+m+1)H(d,s,m)} \\ &\leq 2^{d+2} \cdot 2^{s+m+1} \cdot 2^{(d+1)(s+m+1)H(d,s,m)} \\ &\leq 2^{2(d+1)(s+m+1)} \cdot 2^{(d+1)(s+m+1)H(d,s,m)} \\ &\leq 2^{4(d+1)(s+m+1)H(d,s,m)} \\ &= 2^{H'(d,s,m)} . \quad \square \end{aligned}$$

We are now in a position to establish the membership in TOWER. More precisely, since the height of the tower of exponentials in the bounds we obtained is equal to the system dimension, the problem in fixed dimension d is in d -EXPTIME.

THEOREM 5.3. *Reachability for lossy ABVASS $_{\bar{0}}$ is in TOWER. For every fixed dimension d , it is in PTIME if $d = 0$, and in d -EXPTIME if $d \geq 1$.*

PROOF. By Lemma 3.3, it suffices to consider an ABVASS. We argue in terms of the top-down coverability problem (see §3.2.2): given an ABVASS $\mathcal{A} = \langle Q, d, T_u, T_f, T_s, \emptyset \rangle$, a state q_r and a set of states Q_ℓ , to decide whether \mathcal{A} has a $(q_r, \bar{0})$ -rooted Q_ℓ -leaf-covering deduction tree.

By Lemma 5.1, if \mathcal{A} has such a deduction tree, then it has one of height at most $H(d, |Q|, \max^-(T_u))$. Observing that, in such a deduction tree, all vector components are bounded by

$$(\max^+(T_u) + 1) \cdot H(d, |Q|, \max^-(T_u)) ,$$

we conclude that it can be guessed and checked in


$$O((d+1) \cdot \log((\max^+(T_u) + 1) \cdot H'(d, |Q|, \max^-(T_u))))$$

space by an alternating algorithm which manipulates at most three configurations of \mathcal{A} at a time.

The memberships in the statement (for ABVASS) follow from the fact that $H'(0, |Q|, \max^-(T_u))$ is polynomial, by Proposition 5.2, and since $\text{ALOGSPACE} = \text{PTIME}$, $\text{APSPACE} = \text{EXPTIME}$, and $(d-1)\text{-AEXPSPACE} = d\text{-EXPTIME}$ (see Chandra et al. [1981]). \square

By Proposition 4.1, this shows:

COROLLARY 5.4. *LLW provability is in TOWER.*

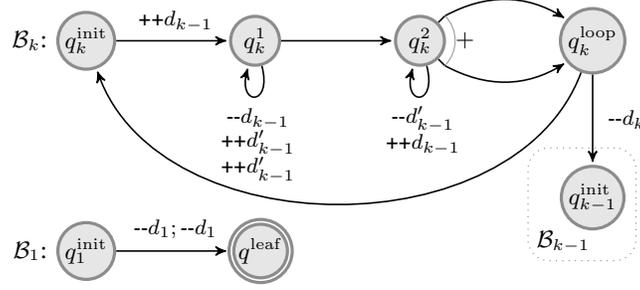Fig. 5. Defining \mathcal{B}_k for $k > 1$ (above), and \mathcal{B}_1 (below).

6. TOWER LOWER BOUNDS

The rough pattern of our hardness proof resembles those by e.g. Urquhart [1999]; Schnoebelen [2010], where a fast-growing function is computed weakly, then its result is used to allocate space for simulating a universal machine, and finally the inverse of the function is computed weakly for checking purposes. Indeed, we simulate Minsky machines whose counters are tower-bounded, but the novelty here is in the inverse computations. Specifically, for each Minsky counter c , we maintain its dual \hat{c} and simulate each zero test on c by a split rule that launches a thread to check that \hat{c} has the maximum value. Recalling that such rules split all values non-deterministically, we must construct the simulating system carefully so that such non-determinism cannot result in erroneous behaviours.

The auxiliary threads check that a counter is at least $\text{tower}(k)$ by seeking to apply split rules at least $\text{tower}(k-1)$ times along every branch. The difficulty here is, similarly, how to count up to $\text{tower}(k-1)$ or more in a manner which is robust with respect to the non-determinism of the split rules.

A hierarchy of BVASS for the latter purpose is given in Figure 5— recall the depicting conventions in §3.1.3. In this system, after the unary rule from q_k^{loop} that decrements d_k , we have that \mathcal{B}_k behaves like \mathcal{B}_{k-1} from state q_{k-1}^{init} .

LEMMA 6.1. *For every $k \geq 1$ and vector of naturals \bar{v}_0 such that $\bar{v}_0(d_i) = \bar{v}_0(d'_i) = 0$ for all $i < k$, we have that \mathcal{B}_k has a $(q_k^{\text{init}}, \bar{v}_0)$ -rooted $\{q^{\text{leaf}}\}$ -leaf-covering deduction tree if and only if $\bar{v}_0(d_k) \geq \text{tower}(k)$.*

PROOF. We proceed by induction on k , where the base case $k = 1$ is immediate, so let us consider $k > 1$ and \bar{v}_0 such that $\bar{v}_0(d_i) = \bar{v}_0(d'_i) = 0$ for all $i < k$.

If $\bar{v}_0(d_k) \geq \text{tower}(k)$, we observe that \mathcal{B}_k can proceed from $(q_k^{\text{init}}, \bar{v}_0)$ as follows:

- each loop at q_k^1 empties d_{k-1} , i.e. doubles d_{k-1} and transfers it to d'_{k-1} ;
- each loop at q_k^2 empties d'_{k-1} , i.e. transfers d'_{k-1} back to d_{k-1} ;
- each split from q_k^2 divides d_{k-1} into two equal values, and divides d_k into two values that differ by at most 1.

In any deduction tree thus obtained, at every node which is the h th node with state label q_k^{loop} from the root, and whose vector label is \bar{w} , we have:

$$\bar{w}(d_{k-1}) = h, \quad \bar{w}(d'_{k-1}) = 0, \quad \bar{w}(d_k) \geq 2^{\text{tower}(k-1)-h}. \quad (15)$$

Hence, by returning control to q_k^{init} as long as the value of d_k is at least 2, \mathcal{B}_k can reach along every vertical path a node with state label q_k^{loop} at which the values of d_{k-1} and d_k are respectively equal to $\text{tower}(k-1)$ and at least 1. To complete the deduction tree

to be $\{q^{\text{leaf}}\}$ -leaf-covering, from every such node we let \mathcal{B}_k decrement d_k and apply the induction hypothesis on \mathcal{B}_{k-1} .

The interesting direction remains, so suppose \mathcal{D} is a $(q_k^{\text{init}}, \bar{v}_0)$ -rooted $\{q^{\text{leaf}}\}$ -leaf-covering deduction tree of \mathcal{B}_k . Since at every q_k^{loop} -labelled node in \mathcal{D} , the value of d_k must be at least 1, it suffices to establish the following claim and apply it for the maximum h :

CLAIM 6.1.1. *For each $0 < h \leq \text{tower}(k-1)$, \mathcal{D} contains 2^h incomparable nodes (i.e., none is a descendant of another) whose state label is q_k^{loop} and at which $d_{k-1} + d'_{k-1}$ has value at most h .*

In turn, by induction on h , that claim is a straightforward consequence of the next one. (For the base case of that induction, i.e. $h = 1$, apply the next claim with $h' = 0$.)

CLAIM 6.1.2. *For each node n in \mathcal{D} whose state label is q_k^{init} and at which $d_{k-1} + d'_{k-1}$ has some value $h' < \text{tower}(k-1)$, there must be two incomparable descendants n_1 and n_2 whose state labels are q_k^{loop} and at which the values of $d_{k-1} + d'_{k-1}$ are at most $h' + 1$.*

Consider a node n as in the latter claim. After the increment of d_{k-1} and the loops at q_k^1 and q_k^2 , the value of $d_{k-1} + d'_{k-1}$ will be at most $2(h' + 1)$. If the first split divides $d_{k-1} + d'_{k-1}$ equally, we are done.

Otherwise, we have a q_k^{loop} -labelled descendant n' of n at which $d_{k-1} + d'_{k-1}$ has value at most h' . In particular, d_{k-1} is less than $\text{tower}(k-1)$ at n' , so recalling the induction hypothesis regarding \mathcal{B}_{k-1} , the child n'' of n' cannot be q_{k-1}^{init} -labelled. Thus, n'' must be q_k^{init} -labelled, and the value of $d_{k-1} + d'_{k-1}$ at n'' is the same as at n' , so at most h' . We can therefore repeat the argument with n'' instead of n , but since \mathcal{D} is finite, two incomparable descendants as required eventually exist. \square

Relying on the properties of the BVASS \mathcal{B}_k , we now establish the hardness of lossy reachability, matching the membership in TOWER in Theorem 5.3 already for BVASS. Although we do not match the upper bounds when the system dimension is fixed, we remark that our simulation uses a number of counters which is linear in the height of the tower of exponentials with coefficient 2.

THEOREM 6.2. *Reachability for lossy BVASS is TOWER-hard.*

PROOF. For a notion of Minsky machines that is similar to how ABVASS_0 were defined in Section 3.1, let such a machine be given by a finite set of states Q , a finite set of counters C , and finite sets of increment rules “ $q \xrightarrow{++c} q_1$,” decrement rules “ $q \xrightarrow{-c} q_1$ ” and zero-test rules “ $q \xrightarrow{c=0} q_1$.” By simulating a tape using two stacks, and simulating a stack using two counters, it is straightforward to verify that the following problem [called $\text{F}_3\text{-MM}$ in Schmitz 2013] is TOWER-hard:

Given a Minsky machine \mathcal{M} and two states q_0, q_H , does \mathcal{M} have a computation that starts in q_0 with all counters having value 0, ends in q_H , and is such that all counter values are at most $\text{tower}(|\mathcal{M}|)$?

We establish the theorem by working with the equivalent top-down coverability problem (see §3.2.2). We show that, given a Minsky machine \mathcal{M} of size K and two states q_0, q_H , then a BVASS $\mathcal{A}(\mathcal{M})$, a state q_r and a finite set $Q_\ell \stackrel{\text{def}}{=} \{q_H, q^{\text{leaf}}\}$ are computable in logarithmic space, such that \mathcal{M} has a 0-initialised $\text{tower}(K)$ -bounded computation from q_0 to q_H if and only if $\mathcal{A}(\mathcal{M})$ has a $(q_r, 0)$ -rooted Q_ℓ -leaf-covering deduction tree.

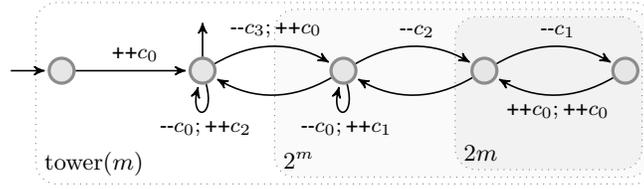


Fig. 6. A VASS weakly computing $\text{tower}(m)$, with input counter c_3 and output counter c_0 [Mayr and Meyer 1981].

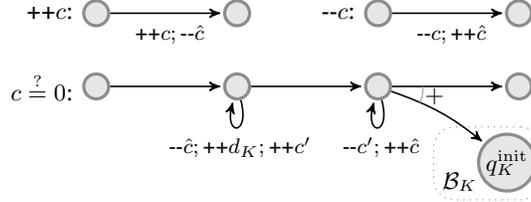


Fig. 7. Simulating the Minsky operations.

For each counter c of \mathcal{M} , there are three counters in $\mathcal{A}(\mathcal{M})$ denoted c, \hat{c}, c' . The initial part of $\mathcal{A}(\mathcal{M})$ employs a “weak Petri computer” [Mayr and Meyer 1981] for the tower function, namely a constant VASS with designated input and output counters and initial and final states. Given a natural number m in its input counter and starting in its initial state, it can compute $\text{tower}(m)$ in its output counter upon reaching its final state, but non-deterministically may also compute a smaller value (but never a larger one). This is a standard construction, using weak routines for $2m$ and 2^m , which we depict in Figure 6. By means of the latter VASS, each counter \hat{c} in $\mathcal{A}(\mathcal{M})$ is initialised to have value $\text{tower}(K)$ or possibly smaller. Recalling that the auxiliary VASS is constant, a simple pattern for incorporating it into $\mathcal{A}(\mathcal{M})$ is to use fresh states and counters for each \hat{c} .

The main part of $\mathcal{A}(\mathcal{M})$ consists of simulating \mathcal{M} from q_0 , using the translations of increments, decrements and zero tests in Figure 7. For the increments and decrements, $\mathcal{A}(\mathcal{M})$ also performs the opposite operation on the hatted counter, thereby keeping the sums $c + \hat{c}$ constant. For the zero tests, $\mathcal{A}(\mathcal{M})$ attempts by two loops and using the primed counter, to copy the hatted counter to d_K and then employ \mathcal{B}_K (see Figure 5) to verify that the latter is maximal (i.e., has value $\text{tower}(K)$). Thus, $\mathcal{A}(\mathcal{M})$ also has counters d_i for $0 < i \leq K$ and d'_i for $0 < i < K$, and more precisely a variant of \mathcal{B}_K is employed that has the same dimension as $\mathcal{A}(\mathcal{M})$ (and does not use the extra counters).

For each 0-initialised $\text{tower}(K)$ -bounded computation of \mathcal{M} from q_0 to q_H , it is straightforward to check that $\mathcal{A}(\mathcal{M})$ can simulate it as follows:

- each counter \hat{c} is initialised to $\text{tower}(K)$;
- in every simulation of a zero test $c \stackrel{?}{=} 0$, the values of c, \hat{c}, c', d_K are resp. $0, \text{tower}(K), 0, 0$ before the two loops, and $0, \text{tower}(K), 0, \text{tower}(K)$ before the split;
- at every start of \mathcal{B}_K , the value of d_K is $\text{tower}(K)$ and all other counters have value 0.

By Lemma 6.1, we obtain a $(q_r, \bar{0})$ -rooted Q_ℓ -leaf-covering deduction tree of $\mathcal{A}(\mathcal{M})$.

The other direction is more involved: we show that, if $\mathcal{A}(\mathcal{M})$ has a $(q_r, \bar{0})$ -rooted Q_ℓ -leaf-covering deduction tree \mathcal{D} , then \mathcal{M} has a 0-initialised $\text{tower}(K)$ -bounded computation from q_0 to q_H . By construction, \mathcal{D} consists of a path π from which there are branchings to deduction trees of \mathcal{B}_K . The main part of π consists of the simulations of increments, decrements and zero tests as in Figure 7. From it, we obtain a 0-initialised

tower(K)-bounded computation of \mathcal{M} from q_0 to q_H , after observing the following for every counter c of \mathcal{M} :

- After \hat{c} is initialised in \mathcal{D} , the value of $c + \hat{c} + c'$ is always at most tower(K).
- For each simulation of a zero test of c , we have by Lemma 6.1 that the value of d_K is tower(K) before the split and is 0 after the split on the path π , and consequently that the values of c, \hat{c}, c' are 0, tower(K), 0 (respectively) before the two loops.
- The value of c may erroneously decrease due to the branchings, but since that makes the value of $c + \hat{c} + c'$ smaller than tower(K), such losses may occur only after the last simulation of a zero test of c , and so cannot result in an erroneous such simulation.
- Similarly, only the last transfer of c' to \hat{c} may be incomplete (i.e., it does not empty c').

We conclude that $\mathcal{A}(\mathcal{M})$ has the required properties. \square

Since lossy reachability reduces to reachability and by Proposition 4.6 and Proposition 4.7, this entails:

COROLLARY 6.3. *Provability in MELL, MELLW, and LLW is TOWER-hard.*

7. ACKERMANN BOUNDS

We investigate in this section the complexity of reachability in increasing or expansive ABVASS $_{\bar{0}}$. The latter is related to provability in contractive linear logic, and as shown by Urquhart [1999], to provability in the conjunctive-implicative fragment of relevance logic, and we treat it in Section 7.3.

7.1. Increasing Reachability

Expansive ABVASS $_{\bar{0}}$ are not quite dual to lossy ABVASS $_{\bar{0}}$: the natural model for this is that of *increasing* ABVASS $_{\bar{0}}$, which feature additional deduction rules

$$\frac{q, \bar{v}}{q, \bar{v} + \bar{e}_i} \text{ increase}$$

for all q in Q and $0 < i \leq d$.

7.1.1. Bottom-Up Coverability. As with lossy reachability, increasing reachability corresponds to a coverability problem in a variant of ABVASS $_{\bar{0}}$. Let us define a variant of ABVASS $_{\bar{0}}$ that provides different semantics

- for rules in T_f as *meets* “ $q \rightarrow q_1 \sqcap q_2$ ” instead of forks, and
- for rules in T_z as *zero-jumps* “ $q \xrightarrow{\bar{\omega}} q_1$ ” instead of full zero tests.

Their semantics are now defined by the deduction rules

$$\frac{q, \bar{v}_1 \sqcap \bar{v}_2}{q_1, \bar{v}_1 \quad q_2, \bar{v}_2} \text{ meet} \quad \frac{q, \bar{0}}{q_1, \bar{v}} \text{ zero-jump}$$

where the *meet* $\bar{v}_1 \sqcap \bar{v}_2$ of two vectors in \mathbb{N}^d is the component-wise minimum of \bar{v}_1 and \bar{v}_2 : for all $0 < i \leq d$,

$$(\bar{v}_1 \sqcap \bar{v}_2)(i) \stackrel{\text{def}}{=} \min(\bar{v}_1(i), \bar{v}_2(i)) . \tag{16}$$

Let us call the resulting model ABVASS $_i$. Given an ABVASS $_i$ \mathcal{A} , a state q_r , and a finite set of states Q_ℓ , the *bottom-up coverability* or *root coverability* problem asks for the existence of a deduction tree \mathcal{D} with root label (q_r, \bar{v}) for some \bar{v} in \mathbb{N}^d where d is the dimension of \mathcal{A} , and with every leaf labelled by some element of $Q_\ell \times \{\bar{0}\}$.

By a reasoning similar to the one employed for top-down coverability in ABVASS r , bottom-up coverability in ABVASS $_i$ corresponds to increasing reachability in

ABVASS₀: by monotonicity we can always increase as soon as possible in the latter, either at the root, or right after a full zero test, or right after an “imbalanced” fork—where increases differ on the two branches.

7.1.2. Pseudo-Increasing ABVASS₀. Let us consider yet another variant of increasing ABVASS₀, which will be used in the complexity analysis, and which combines increasing steps with unary steps. Given a vector \bar{u} in \mathbb{Z}^d , let us denote by \bar{u}_- the vector in \mathbb{N}^d defined for all $0 < i \leq d$ by

$$\bar{u}_-(i) \stackrel{\text{def}}{=} \begin{cases} -\bar{u}(i) & \text{if } \bar{u}(i) < 0 \\ 0 & \text{otherwise.} \end{cases} \quad (17)$$

Then, for a vector \bar{v} in \mathbb{N}^d , the *join* $\bar{v} \sqcup \bar{u}_-$ defined for all $0 < i \leq d$ by

$$(\bar{v} \sqcup \bar{u}_-)(i) \stackrel{\text{def}}{=} \max(\bar{v}(i), \bar{u}_-(i)) \quad (18)$$

is the minimal vector greater or equal to \bar{v} that allows to fire a unary rule with vector \bar{u} .

A *pseudo-increasing* ABVASS₀ does not have the increasing rule, but uses instead a different semantics for its unary rules $q \xrightarrow{\bar{u}} q'$ in T_u , which can be used for *any* \bar{v} in \mathbb{N}^d :

$$\frac{q, \bar{v}}{q', (\bar{v} \sqcup \bar{u}_-) + \bar{u}} \text{ pseudo-unary}$$

The idea of the pseudo-unary rule is that it implicitly applies the minimal amount of increase necessary to use a given unary rule.

Reachability (from $(q_r, \bar{0})$ to $Q_\ell \times \{\bar{0}\}$) in an increasing ABVASS₀ is then equivalent to reachability in the same ABVASS₀ with pseudo-increasing semantics. We can indeed delay increases occurring right before another rule: an increase right before a fork or a split can be performed after it, no increase can occur right before a full zero test, and *superfluous* increases right before a unary rule $q \xrightarrow{\bar{u}} q'$ can be performed after it, i.e. an increase from (q, \bar{v}) to $(q, \bar{v} + \bar{e}_i)$ with $\bar{v} \geq \bar{u}_-$ can rather be performed from $(q', \bar{v} + \bar{u})$ to $(q', \bar{v} + \bar{e}_i + \bar{u})$. The remaining increases right before unary rules become part of pseudo-unary rules.

7.2. Complexity of Increasing Reachability

In the more restricted case of BVASS, which do not feature forks nor full zero tests, bottom-up coverability coincides with increasing reachability, and this problem was called more simply “coverability” by Verma and Goubault-Larrecq [2005]:

FACT 7.1 (DEMRI ET AL. [2013]). *Reachability in increasing BVASS is 2-EXPTIME-complete.*

Since increasing ABVASS₀ are not too different from expanding ABVASS₀, the fact that their complexity is the same is not too surprising:

THEOREM 7.2. *Reachability in increasing AVASS and increasing ABVASS₀ is ACKERMANN-complete.*

PROOF. For the lower bound, a reduction from the reachability problem in *increasing* Minsky machines [Schnoebelen 2010] is straightforward, since it uses the same encoding of zero tests as the proof sketch for Fact 3.2.

For the upper bound, by Lemma 3.3, we can restrict ourselves to ABVASS without loss of generality. Define the partial order \leq over configurations in $Q \times \mathbb{N}^d$ by $(q, \bar{v}) \leq (q', \bar{v}')$ if $q = q'$ and $\bar{v} \leq \bar{v}'$; this is the product ordering over $Q \times \mathbb{N}^d$, where Q is ordered using equality. By Dickson’s Lemma, $(Q \times \mathbb{N}^d, \leq)$ is a *well quasi order*. The proof for

the upper bound thus follows the typical steps of an application of the *length function theorem* for Dickson's Lemma found in [Figueira et al. 2011].

Let us consider an increasing reachability witness \mathcal{D} and the sequence of labels $(q_r, \bar{0}) = (q_0, \bar{v}_0), (q_1, \bar{v}_1), \dots, (q_m, \bar{v}_m) \in Q_\ell \times \{0\}$ along some branch n_0, n_1, \dots, n_m of \mathcal{D} . By ignoring the intermediate increase steps, we extract a *pseudo-subsequence* $(q_{i_0}, \bar{v}_{i_0}), (q_{i_1}, \bar{v}_{i_1}), \dots, (q_{i_p}, \bar{v}_{i_p})$ with $(q_{i_0}, \bar{v}_{i_0}) \geq (q_r, \bar{0})$ and, for each $0 < j \leq p$, $(q_{i_j}, \bar{v}_{i_j}) \geq (q_{i_{j-1}+1}, \bar{v}_{i_{j-1}+1})$.

Assume now that \mathcal{D} , among all the increasing reachability witnesses, has pseudo-subsequences of minimal length (noted $p + 1$ above) along each branch. Then, along any branch, for all $0 \leq j < k \leq p$, $(q_{i_j}, \bar{v}_{i_j}) \not\leq (q_{i_k}, \bar{v}_{i_k})$, or a sequence of increases would allow to go from $n_{i_{j-1}}$ to n_{i_k} directly with a strictly shorter pseudo-subsequence. In terms of the wqo, this means that, along any branch, the pseudo-subsequence is a *bad* sequence. Let us furthermore apply the strategy in §7.1.2 and delay increases as much as possible—note that this might provide further opportunities for reducing the length of pseudo-sequences along the branches of \mathcal{D} . The resulting increasing reachability witness, where the remaining increases occur necessarily just before unary rules, can then be seen as a *pseudo-increasing* reachability witness, where every sequence of labels along every branch is a bad sequence for the wqo $(Q \times \mathbb{N}^d, \leq)$.

Define the *norm* $\|q, \bar{v}\|$ of a configuration (q, \bar{v}) in $Q \times \mathbb{N}^d$ as the infinite norm $\max_{0 < i \leq d} \bar{v}(i)$ of \bar{v} . Observe that, along any branch of a pseudo-increasing reachability witness, if (q_j, \bar{v}_j) and (q_{j+1}, \bar{v}_{j+1}) are two successive labels, then

$$\|q_{j+1}, \bar{v}_{j+1}\| \leq \|q_j, \bar{v}_j\| + \max^-(T_u) + \max^+(T_u). \quad (19)$$

Define accordingly $g(x) \stackrel{\text{def}}{=} x + \max^-(T_u) + \max^+(T_u)$, then for the j th label along a branch, $\|q_j, \bar{v}_j\| \leq g^j(0)$ the j th iterate of g . This shows that the sequence of labels along every branch of our pseudo-increasing reachability witness is a bad sequence controlled by $(g, 0)$.

A *length function theorem* for a wqo is a combinatorial statement bounding the length of bad controlled sequences. In our case, for the wqo $(Q \times \mathbb{N}^d, \leq)$ and the control $(g, 0)$, the theorem in [Figueira et al. 2011] yields an

$$F_{d+1}(p(\max^-(T_u) + \max^+(T_u)), |Q|) \leq \text{Ack}(p'(|A|)) \quad (20)$$

upper bound on the length of branches for some polynomial functions p and p' , where $(F_d: \mathbb{N} \rightarrow \mathbb{N})_d$ is a hierarchy of fast-growing functions [Löb and Wainer 1970] with $\text{Ack}(n) \stackrel{\text{def}}{=} F_{n+1}(n)$. A non-deterministic combinatorial algorithm can thus compute the bound in (20) and attempt to find a pseudo-increasing witness of such bounded height (note that the branching degree of witnesses is also bounded) in Ackermannian time. As with lossy reachability, the main parameter in this complexity upper bound is the dimension d of the ABVASS $_{\bar{0}}$. \square

7.3. Complexity of Expansive Reachability

Turning to expansive reachability, we present now the missing proof of Theorem 3.7:

THEOREM 3.7. *Reachability in expansive AVASS and expansive ABVASS $_{\bar{0}}$ is ACKERMANN-complete.*

PROOF. The lower bound is proved by Urquhart [1999]. The upper bound is also similar to that of Urquhart for provability in LR+, and follows essentially the same scheme as in the increasing case in the proof of Theorem 7.2. By Lemma 3.3 we restrict ourselves to ABVASS. Define the partial order \sqsubseteq over configurations in $Q \times \mathbb{N}^d$ by $(q, \bar{v}) \sqsubseteq (q', \bar{v}')$ if $q = q'$, $\bar{v} \leq \bar{v}'$, and $\sigma(\bar{v}) = \sigma(\bar{v}')$, where $\sigma(\bar{v}) \stackrel{\text{def}}{=} \{0 < i \leq d \mid \bar{v}(i) > 0\}$ denotes the *support* of \bar{v} . The quasi-order $(Q \times \mathbb{N}^d, \sqsubseteq)$ is isomorphic to the sub-order of

Table I. The complexity of provability in fragments and variants of LL.

	MELL	LL
	TOWER-hard, Σ_1^0 -easy	Σ_1^0 -c. [Lincoln et al. 1992]
with W	TOWER-c.	TOWER-c.
with C	2EXP-c. [Schmitz 2014]	ACK-c.

Table II. The complexity of reachability problems in $ABVASS_0$.

	AVASS	BVASS	ABVASS ₀
Reachability	Σ_1^0 -c. [Lincoln et al. 1992]	TOWER-hard, Σ_1^0 -easy	Σ_1^0 -c.
Lossy reach.	2EXP-c. [Courtois and Schmitz 2014]	TOWER-c.	TOWER-c.
Incr. reach.	ACK-c. [Urquhart 1999]	2EXP-c. [Demri et al. 2013]	ACK-c.

the product ordering over $Q \times \mathbb{N}^d \times 2^d$ induced by the restriction to triples (q, \bar{v}, s) where $\sigma(\bar{v}) = s$, and is therefore a wqo by Dickson's Lemma.

Substituting \sqsubseteq for \leq , we show as in the proof of Theorem 7.2 that, if there is an expansive reachability witness \mathcal{D} , then there is one where pseudo sequences are bad sequences for $(Q \times \mathbb{N}^d, \sqsubseteq)$ along each branch, and where expansions are applied as late as possible. Thus \mathcal{D} can be seen as a *pseudo-expansive* reachability witness, using the semantics of pseudo-unary rules for unary rules in T_u , with the additional restriction that such a rule can only be applied if $\sigma(\bar{u}_-) \subseteq \sigma(\bar{v})$. This restriction reflects the fact that expansions cannot increase a zero coordinate in \bar{v} . The remaining steps are the same as in the proof of Theorem 7.2: the sequences of labels along the branches of \mathcal{D} are bad $(g, 0)$ -controlled sequences for $(Q \times \mathbb{N}^d, \sqsubseteq)$, and we obtain similarly an

$$F_{d+1}(p(\max^-(T_u) + \max^+(T_u), |Q| \cdot 2^d)) \leq \text{Ack}(p'(|A|)) \quad (21)$$

upper bound on the height of our witness, for some polynomial functions p and p' . Again, the main complexity parameter is the dimension d of the $ABVASS_0$. \square

COROLLARY 7.3. *MALLC and LLC provability are ACKERMANN-complete.*

PROOF. By Theorem 3.7 and the reductions from LLC provability to $ABVASS_0$ expansive reachability in Proposition 4.1 and from AVASS expansive reachability to MALLC provability in Proposition 4.9. \square

8. CONCLUDING REMARKS

Although connections between propositional linear logic and families of counter machines have long been known, they have rarely been exploited for complexity-theoretic results. Using a model of alternating branching VASS, we have unified several of these connections, and derived complexity bounds for provability in substructural logics from the (old and new) bounds on $ABVASS_0$ reachability, summarised in Table I and Table II respectively.

Our main results in this regard are the TOWER-completeness of provability in LLW and the new TOWER lower bound for MELL: the latter has consequences on numerous problems mentioned in Section 3, and entails for instance that the satisfiability problem for FO^2 on data trees is non-elementary [Bojańczyk et al. 2009; Dimino et al. 2013]. The ACKERMANN-completeness of MALLC and LLC is perhaps less surprising in the light of Urquhart's results, but we take it as a testimony to the versatility of the $ABVASS_0$ model.

The main open question remains whether BVASS reachability, or equivalently MELL provability, is decidable.

REFERENCES

- Parosh Aziz Abdulla, Richard Mayr, Arnaud Sangnier, and Jeremy Sproston. 2013. Solving Parity Games on Integer Vectors. In *Proc. Concur 2013*. Lect. Notes in Comput. Sci., Vol. 8052. Springer, 106–120. DOI: 10.1007/978-3-642-40184-8_9
- Andrea Asperti and Luca Roversi. 2002. Intuitionistic Light Affine Logic. *ACM Trans. Comput. Logic* 3, 1 (2002), 137–175. DOI: 10.1145/504077.504081
- Mikołaj Bojańczyk, Anca Muscholl, Thomas Schwentick, and Luc Segoufin. 2009. Two-variable logic on data trees and XML reasoning. *J. ACM* 56, 3 (2009), 1–48. DOI: 10.1145/1516512.1516515
- Ahmed Bouajjani and Michael Emmi. 2013. Analysis of Recursively Parallel Programs. *ACM Trans. Prog. Lang. Syst.* 35, 3 (2013), 10:1–10:49. DOI: 10.1145/2518188
- Tomáš Brázdil, Petr Jančar, and Antonín Kučera. 2010. Reachability Games on Extended Vector Addition Systems with States. In *Proc. ICALP 2010*. Lect. Notes in Comput. Sci., Vol. 6199. Springer, 478–489. DOI: 10.1007/978-3-642-14162-1_40
- Ashok K. Chandra, Dexter C. Kozen, and Larry J. Stockmeyer. 1981. Alternation. *J. ACM* 28, 1 (1981), 114–133. DOI: 10.1145/322234.322243
- Krishnendu Chatterjee, Laurent Doyen, Thomas A. Henzinger, and Jean-François Raskin. 2010. Generalized Mean-payoff and Energy Games. In *Proc. FSTTCS 2010*. Leibniz Int. Proc. Inf., Vol. 8. LZI, 505–516. DOI: 10.4230/LIPIcs.FSTTCS.2010.505
- Jean-Baptiste Courtois and Sylvain Schmitz. 2014. Alternating Vector Addition Systems with States. In *Proc. MFCS 2014*. Lect. Notes in Comput. Sci., Vol. 8634. Springer, 220–231. DOI: 10.1007/978-3-662-44522-8_19
- Philippe de Groote, Bruno Guillaume, and Sylvain Salvati. 2004. Vector Addition Tree Automata. In *Proc. LICS 2004*. IEEE Computer Society, 64–73. DOI: 10.1109/LICS.2004.51
- Stéphane Demri, Marcin Jurdziński, Oded Lachish, and Ranko Lazić. 2013. The covering and boundedness problems for branching vector addition systems. *J. Comput. Syst. Sci.* 79, 1 (2013), 23–38. DOI: 10.1016/j.jcss.2012.04.002
- Jérémie Dimino, Florent Jacquemard, and Luc Segoufin. 2013. $FO^2(<, +1, \sim)$ on data trees, data tree automata and an extension of BVASS. (2013). <http://hal.inria.fr/hal-00769249> Manuscript.
- Diego Figueira, Santiago Figueira, Sylvain Schmitz, and Philippe Schnoebelen. 2011. Ackermannian and Primitive-Recursive Bounds with Dickson’s Lemma. In *Proc. LICS 2011*. IEEE Computer Society, 269–278. DOI: 10.1109/LICS.2011.39
- Max I. Kanovich. 1995. Petri nets, Horn programs, Linear Logic and vector games. *Ann. Pure App. Logic* 75, 1–2 (1995), 107–135. DOI: 10.1016/0168-0072(94)00060-G
- Alexei P. Kopylov. 2001. Decidability of Linear Affine Logic. *Inform. and Comput.* 164, 1 (2001), 173–198. DOI: 10.1006/inco.1999.2834
- Yves Lafont. 1997. The Finite Model Property for Various Fragments of Linear Logic. *J. Symb. Log.* 62, 4 (1997), 1202–1208. DOI: 10.2307/2275637
- Dominique Larchey-Wendling and Didier Galmiche. 2013. Nondeterministic Phase Semantics and the Undecidability of Boolean BI. *ACM Trans. Comput. Logic* 14, 1 (2013), 6:1–6:41. DOI: 10.1145/2422085.2422091
- Ranko Lazić. 2010. The reachability problem for branching vector addition systems requires doubly-exponential space. *Inf. Process. Lett.* 110, 17 (2010), 740–745. DOI: 10.1016/j.ipl.2010.06.008
- Patrick Lincoln, John Mitchell, Andre Scedrov, and Natarajan Shankar. 1992. Decision problems for propositional linear logic. *Ann. Pure App. Logic* 56, 1–3 (1992), 239–311. DOI: 10.1016/0168-0072(92)90075-B
- Richard Lipton. 1976. *The reachability problem requires exponential space*. Technical Report 62. Yale University.
- Martin H. Löb and Stanley S. Wainer. 1970. Hierarchies of number theoretic functions, I. *Arch. Math. Logic* 13 (1970), 39–51. DOI: 10.1007/BF01967649
- Ernst W. Mayr and Albert R. Meyer. 1981. The Complexity of the Finite Containment Problem for Petri Nets. *J. ACM* 28, 3 (1981), 561–576. DOI: 10.1145/322261.322271
- Mitsuhiro Okada and Kazushige Terui. 1999. The Finite Model Property for Various Fragments of Intuitionistic Linear Logic. *J. Symb. Log.* 64, 2 (1999), 790–802. DOI: 10.2307/2586501
- Charles Rackoff. 1978. The covering and boundedness problems for vector addition systems. *Theor. Comput. Sci.* 6, 2 (1978), 223–231. DOI: 10.1016/0304-3975(78)90036-1
- Owen Rambow. 1994. Multiset-valued linear index grammars: imposing dominance constraints on derivations. In *Proc. ACL ’94*. ACL Press, 263–270. DOI: 10.3115/981732.981768
- Sylvain Schmitz. 2010. On the Computational Complexity of Dominance Links in Grammatical Formalisms. In *Proc. ACL 2010*. ACL Press, 514–524.
- Sylvain Schmitz. 2013. Complexity Hierarchies Beyond Elementary. Preprint. (2013). <http://arxiv.org/abs/1312.5686>
- Sylvain Schmitz. 2014. Implicational Relevance Logic is 2-EXPTIME-Complete. In *Proc. RTA-TLCA 2014*. Lect. Notes in Comput. Sci., Vol. 8560. Springer, 395–409. DOI: 10.1007/978-3-319-08918-8_27

- Philippe Schnoebelen. 2010. Revisiting Ackermann-Hardness for Lossy Counter Machines and Reset Petri Nets. In *Proc. MFCS 2010*. Lect. Notes in Comput. Sci., Vol. 6281. Springer, 616–628. DOI:10.1007/978-3-642-15155-2_54
- Anne Sjerp Troelstra. 1992. *Lectures on Linear Logic*. CSLI Lecture Notes, Vol. 29. Center for the Study of Language and Information.
- Alasdair Urquhart. 1999. The Complexity of Decision Procedures In Relevance Logic II. *J. Symb. Log.* 64, 4 (1999), 1774–1802. DOI:10.2307/2586811
- Alasdair Urquhart. 2000. The Complexity of Linear Logic with Weakening. In *Proc. Logic Colloquium '98*. Lect. Notes in Logic, Vol. 13. ASL, 500–515.
- Kumar Neeraj Verma and Jean Goubault-Larrecq. 2005. Karp-Miller Trees for a Branching Extension of VASS. *Disc. Math. Theor. Comput. Sci.* 7, 1 (2005), 217–230.