

**Manuscript version: Author's Accepted Manuscript**

The version presented in WRAP is the author's accepted manuscript and may differ from the published version or Version of Record.

**Persistent WRAP URL:**

<http://wrap.warwick.ac.uk/174491>

**How to cite:**

Please refer to published version for the most recent bibliographic citation information. If a published version is known of, the repository item page linked to above, will contain details on accessing it.

**Copyright and reuse:**

The Warwick Research Archive Portal (WRAP) makes this work by researchers of the University of Warwick available open access under the following conditions.

Copyright © and all moral rights to the version of the paper presented here belong to the individual author(s) and/or other copyright owners. To the extent reasonable and practicable the material made available in WRAP has been checked for eligibility before being made available.

Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

**Publisher's statement:**

Please refer to the repository item page, publisher's statement section, for further information.

For more information, please contact the WRAP Team at: [wrap@warwick.ac.uk](mailto:wrap@warwick.ac.uk).

# Safeguarding the Nation's Digital Memory: Bayesian Network modelling of digital preservation risks

Martine J. Barons, Thais C. O. Fonseca, Hannah Merwood and David H. Underdown

## 1 Introduction

Archives comprise primary sources which can be physical, born digital and digitised. Digital records have a limited lifespan, through carrier degradation, software and hardware obsolescence and storage frailties. It is important that the original bit-stream of these primary sources is preserved and can be demonstrated to have been preserved; this consumes significant resources [1]. Digital preservation (DP) is crucial for ensuring the longevity of societal history, for research, legal accountability, government and business planning. It is a maturing field, with the main standards around 20 years old. Larger (and relatively better funded) archives such as national, state and provincial archives in high income countries have been engaged in DP for longer periods. It is now becoming a pressing issue for all archives.

The archival sector typically lacks sufficient people, sufficiently skilled people and sufficient funding to undertake all possible mitigations against these risks. Thus, there is a need for support in choosing the mitigation strategies which bring the largest and most immediate reduction in overall risk levels in the current context of an individual archive: there is not a 'one-size fits all' solution.

---

Martine J. Barons

AS&RU, Department of Statistics, University of Warwick, Coventry, UK e-mail: martine.barons@warwick.ac.uk

Thais C O Fonseca

Department of Statistical Methods, Universidade Federal do Rio de Janeiro, Av. Athos da Silveira Ramos - Cidade Universitária - RJ, 21941-909, Brazil e-mail: thais@im.ufrj.br

Hannah Merwood

Government Operational Research Service, London, UK

David H. Underdown

The National Archives, Bessant Drive, Richmond, Surrey, TW9 4DU, UK e-mail: david.underdown@nationalarchives.gov.uk

The National Archives in the United Kingdom (TNA), and the Applied Statistics & Risk Unit (AS&RU) at the University of Warwick collaborated to build decision support suitable for identifying risks to digital archives and quantifying the efficacy of mitigation strategies, the Digital Archiving Graphical Risk Assessment Model (DiAGRAM) [2].

## 2 Methodology

Soft elicitation [3] with experienced archivists was used to identify the most likely elements contributing to digital preservation success and failure and the relationships between these elements. This established, it became obvious that a Bayesian Network [4, 5] representation of an integrating decision support system (IDSS, [6, 7]) would be appropriate as a compact representation of reality in this case. However, not all the data required to quantify the model was available, so structured expert judgement was employed to provide data in the gaps. The Integrated Decision Support System (IDSS) is a new paradigm for drawing together evidence from different parts of large systems to provide decision support. Each part of the system is typically overseen by a panel of domain experts using their own data and, often complex, models. Panels contribute key summaries of future expectations under different candidate policy decisions. The IDSS then allows the decision centre to calculate expected utility scores for these candidate policies for comparison and decision support.

### 2.1 Bayesian networks

A discrete Bayesian Network as defined in [4] is a compact representation of the joint probability distribution  $p(\mathbf{x})$  of a  $p$ -variate vector of random variables  $\mathbf{X} = (X_1, \dots, X_p)'$ . The model is specified by the set  $\mathcal{N} = (\mathcal{X}, \mathcal{G}, \mathcal{P})$  with elements given by

1. a graph  $\mathcal{G} = (V, E)$  with nodes  $V$  and connections  $E$ ;
2. a set of variables  $\mathcal{X}$  representing the nodes of  $\mathcal{G}$ ;
3. a set of conditional distributions  $\mathcal{P}$  with distribution  $p_i(x_i | x_{pa(i)})$  for each  $X_i \in \mathcal{X}$ ,

where  $X_{pa(i)}$  is the set of parents of  $X_i$ . A Bayesian Network model is composed by the representation of  $f$  induced by  $\mathcal{N}$  which is given by

$$p(\mathbf{x}) = \prod_{v \in \mathcal{X}} p_i(x_v | x_{pa(v)}).$$

The inferential problem depends on the computation of  $P(X_v = x_v | \varepsilon)$ ,  $X_v \in \mathcal{X}$  given a set of evidences  $\varepsilon$ , that is, the computation of total probabilities depending

on sums and multiplications. However, this computation is costly even for small  $p$ . Often algorithms such as Logic Sampling are used to approximate the predictive probabilities of interest. In the context of categorical data, the distributions assumed for the observations are multinomial such that  $X_i | X_{pa(i)} = j, \boldsymbol{\theta}_{ij} \sim Mult(M_{ij}, \boldsymbol{\theta}_{ij})$  and are represented as conditional probability tables (CPTs). If a Dirichlet prior with parameter  $\mathbf{a}_{ij}$  is assumed for  $\boldsymbol{\theta}_{ij}$  then the posterior distribution is Dirichlet with parameter  $\mathbf{N}_{ij} + \mathbf{a}_{ij}$  with  $N_{ijk}$  the counts of  $\{X_{ik} = x_{ik}\}$  when  $\{X_{pa(i)} = j\}$ . For a practical guide on how to perform inference and prediction using Bayesian Networks see [8].

Where data was not available, Structured Expert Judgement (SEJ) was used to quantify experts' uncertainties on the values for the conditional probability tables.

## 2.2 Structured Expert Judgement

Expert judgement is pervasive in all forms of risk analysis [7]. Structured expert judgement elicitation is a well-established paradigm for eliciting expert judgements of uncertain quantities and event occurrences [9]. Structured protocols seek to mitigate the most pervasive cognitive frailties when asking for subjective judgements, such as group-think, availability bias, personality effects and overconfidence. We used the recently-developed IDEA protocol [10]. Calibration questions are included, drawn from existing surveys and reports, on which individual experts' accuracy and informativeness can be calculated for performance-weighted pooling of the results into a single distribution, using the classical approach [11].


## 3 DiAGRAM

The Digital Archiving Graphical Risk Assessment Model (DiAGRAM) is a bespoke tool developed to facilitate the computation of digital preservation risks and provide comparison of competing policies. It aims to improve users' understanding of digital archiving risks, empower archivists to compare and prioritise different threats to the digital and to aid in quantifying the impact of risk events and risk management strategies on digital preservation to support decision making.

The model contains the network elicited using soft elicitation  $\mathcal{G}$  and the conditional probability tables  $\mathcal{P}$  representing the uncertainty in the nodes obtained via historical data when it is available, and through SEJ elicitation otherwise.

### 3.1 Network structure construction

The variables and the qualitative relationships between them were elicited through close communication with domain experts. The experts' collective views were represented by a Directed Acyclic Graph (DAG) (figure 1). The variables included in the model were Digital Object, Identity, Conditions of Use, Intellectual Control, Information Management, Technical Skills, Operating Environment, Content Metadata, Technical Metadata, Checksum, File Format, Bit-preservation, Obsolescence, Tools to render, Storage Medium, Storage Life, Replication and Refreshment, System Security, Integrity and Renderability<sup>1</sup>. The variables Intellectual Control and Renderability comprise the utility function which provides comparative scores for candidate policies in the policy comparison step. See [2] for further details on structure construction and node definitions.

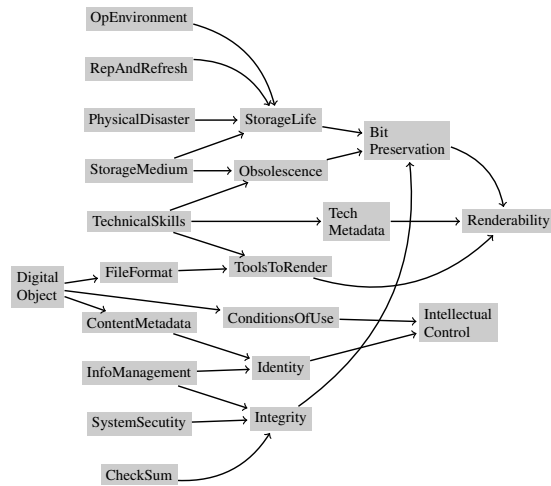

**Fig. 1** Qualitative description of the digital preservation system.

### 3.2 Expert elicitation results

SEJ was used in DiAGRAM to quantify Storage life, Obsolescence, Technical Metadata, Tools to Render, Conditions of Use, Content Metadata, Identity, Integrity, Bit Preservation and Renderability. In the elicitation sessions, 22 participating experts answered 20 calibration questions and 24 questions of interest. The transformed Kullback-Leibler divergence and the performance-weighted outcomes for all experts are presented in table 1. The results show experts 8, 12 and 16 had the best

<sup>1</sup> See DiAGRAM's 'Glossary' tab here: <https://nationalarchives.shinyapps.io/DiAGRAM/>

performances on the calibration questions and experts 13, 20, and 21 had the worst performances.

Expert ID	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
KL divergence	14	11	10	25	20	9	36	6	37	25	17	6	45	19	19	6	24	26	28	48	66	8
Final weight	7	25	33	0	0	38	0	229	0	0	3	209	0	1	1	295	0	0	0	0	0	158

**Table 1** Experts ID, experts transformed Kullback-Leibler (KL) divergence and final combined weights ( $\times 10^3$ ). Weights close to 0 indicate worse performances and close to 1 ( $\times 10^3$ ) indicate better performances.

### 3.3 Joint Probability distribution

This section computes the probability distributions based on the structure, tables elicited from experts and data available. The data sources used were: the 2019 JISC digital skills survey of over 300 UK archive professionals; the cloud data storage providers on access and durability; data from the Environment Agency on the long-term flood risk of UK postcodes; and data from TNA on file formats by digital object type.

In DiAGRAM, of the 21 nodes, 9 have the probabilities customisable by the users to reflect their institution: Digital Object, Operating Environment, Replication and Refreshment Storage Medium, Technical Skills, Information Management, System Security and Checksum.

For comparative purposes DiAGRAM provides a Baseline Model (BM) where the customisable nodes are set to: 1) no technical skills; 2) good level of system security (74%); 3) 0% of files have a check-sum; 4) 14% of files have sufficient internal information management systems in place; 5) 100% of the digital archive is born digital; 6) 100% of storage media are stored on outsourced (cloud) storage; 7) 100% of files have a good replication and refreshment strategy in place; 8) operating environment was considered 100% as all files have copies in different locations; 9) The risk of physical disaster (flood risk rating) is very low. For this baseline model, the conditional probability table for the node Identity obtained in DiAGRAM for this setup is presented in figure 2. Probability tables for all nodes can be obtained and are used to compute the final utility function.


**Fig. 2** Conditional probability table for the node Identity obtained in DiAGRAM for the baseline Commercial Backup model.

	Info Management	Content Metadata	Yes	No
1	Sufficient	Yes	1.00	0.00
2	Sufficient	No	0.53	0.47
3	Insufficient	Yes	0.00	1.00
4	Insufficient	No	0.00	1.00

### 3.4 Utility computation and scenario evaluation

In consultation with a wide range of digital archivists, the utility for DiAGRAM was defined as Renderability and Intellectual Control. Renderability (R) captures the need for the digital object to be a sufficiently useful representation of the original file. ‘Sufficiently useful’ depends on the use to which a digital object is being put. Intellectual Control (IC) is the archivist’s need to have full knowledge of the digital object’s content, provenance and conditions of use. IC requires sufficient metadata that the archivist can identify the appropriate object, see how it relates to other objects from the same source, and understand whether they have the copyright permissions to make reproductions, or if data protection, etc. prevents the object from being made publicly available (and how long those restrictions will remain applicable).

We compare the Baseline Model with the alternative scenario of Commercial Backup (CB), which is as BM but improving information management to 43% and technical skill level to 30%. The risk scores for BM and the CB are compared using a linear utility function (figure 3). The CB scenario has larger total score (62: IC=20, R=42) than BM (44: IC=6, R=38), showing that moving to CB improves digital preservation.

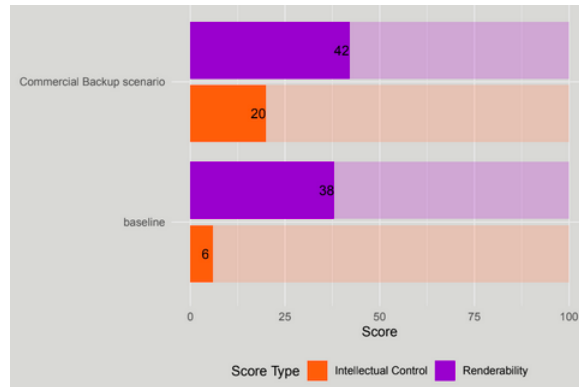

**Fig. 3** Intellectual Control and Renderability scores comparison for the Baseline Commercial Backup Model and the Commercial Backup Scenario.

**Acknowledgements** The authors acknowledge with gratitude valuable contributions to the project by staff from partner institutions,<sup>2</sup> and by the additional experts who participated in the elicitation. This work was supported by: the National Lottery Heritage Fund under project reference number OM-19-01060; The Engineering and Physical Sciences Research Council under grant EP/R511808/1; and The National Archives (UK).

<sup>2</sup> See project webpage: <https://www.nationalarchives.gov.uk/information-management/manage-information/preserving-digital-records/research-collaboration/safeguarding-the-nations-digital-memory/>

## References

1. Rebecca D Frank. The social construction of risk in digital preservation. *Journal of the association for information science and technology*, 71(4):474–484, 2020.
2. Martine Barons, Sidhant Bhatia, Jodie Double, Thais Fonseca, Alex Green, Stephen Krol, Hannah Merwood, Alec Mulinder, Sonia Ranade, Jim Q Smith, Tamara Thornhill, and David H Underdown. Safeguarding the nation’s digital memory: towards a Bayesian model of digital preservation risk. *Archives and Records*, 42(1):58–78, 2021.
3. Simon French. From soft to hard elicitation. *Journal of the Operational Research Society*, pages 1–17, 2021.
4. F. Jensen and T. D. Nielsen. *Bayesian networks and decision graphs*. Springer, 2007.
5. Jim Q Smith. *Bayesian decision analysis: principles and practice*. Cambridge University Press, 2010.
6. Jim Q Smith, Martine J Barons, and Manuele Leonelli. Coherent frameworks for statistical inference serving integrating decision support systems. *arXiv preprint arXiv:1507.07394*, 2015.
7. Martine J Barons, Sophia K Wright, and Jim Q Smith. *Eliciting probabilistic judgements for integrating decision support systems*. Springer, New York, New York, USA, 2018.
8. Marco Scutari and Jean-Baptiste Denis. *Bayesian Networks: With Examples in R*. CRC Press, 2014.
9. F. Bolger, A. Hanea, A. O’ Hagan, O. Mosbach-Schulz, J. Oakley, G. Rowe, and M. Wenholt. Guidance on Expert Knowledge Elicitation in Food and Feed Safety Risk Assessment. *EFSA Journal*, 12(6):Parma, Italy, 2014.
10. A. Hanea, M. McBride, M. Burgman, B. Wintle, F. Fidler, L. Flander, S. Mascaro, and B. Manning. *InvestigateDiscussEstimateAggregate* for structured expert judgement. *International Journal of Forecasting*, 33(1):267–279, 2016.
11. Roger Cooke, Max Mendel, and Wim Thijs. Calibration and information in expert resolution; a classical approach. *Automatica*, 24:87–93, 1988.